

Download

DXF 2D
- triled.dxf
Montaggi
- TRIALONE_LED rev4.pdf



Trial-One LED

Designing an artificial lighting project means facilitating one of man's most important functions: "vision". This is why, especially when dealing with exhibitions, the light effect should never be overlooked: it is like a magic touch that animates a static setting, and even penetrates matter.

Housing: Pressed steel with cooling holes.


Coating: UV-stabilised, humidity-resistant acrylic-resin liquid paint.

Standard supply: Only supplied with an aluminium bracket for attaching the base or the track mounting adapter.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Power factor: ≥ 0.95

Luminous flux maintenance 80%: 50000h (L80B20)

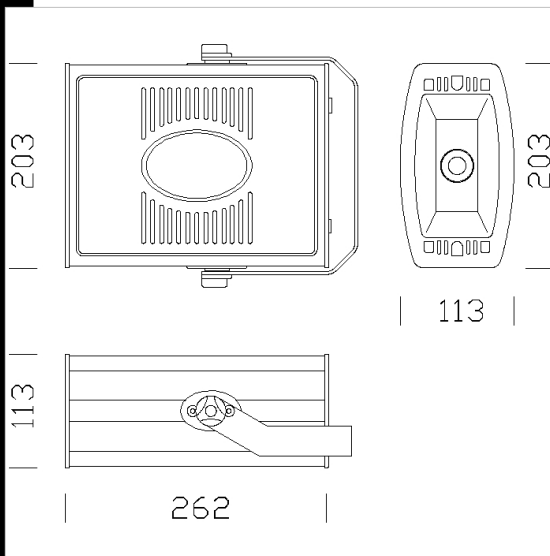

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22347610-00	CLD CELL	2,85	LED COB-4648lm-4000K-CRI 92	46 W	WHITE
22347670-00	CLD CELL	2,95	LED COB-4648lm-4000K-CRI 92	46 W	SILVER
22347510-00	CLD CELL	3,00	LED COB-4216lm-4000K-CRI 92	39 W	WHITE
22347570-00	CLD CELL	3,00	LED COB-4216lm-4000K-CRI 92	39 W	SILVER
22347410-00	CLD CELL	2,95	LED COB-4183lm-3000K-CRI 92	39 W	WHITE
22347470-00	CLD CELL	2,95	LED COB-4183lm-3000K-CRI 92	39 W	SILVER
22347310-00	CLD CELL	2,90	LED COB-2303lm-3000K-40°-CRI>95	26 W	WHITE
22347370-00	CLD CELL	2,90	LED COB-2303lm-3000K-40°-CRI>95	26 W	SILVER

Accessori



- Four sided shutter



- Power adapter



- Mechanical adapter



- Universal power adapter



- Mechanical + power adapter

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated