




Download

DXF 2D
- argon29.dxf
Montaggi
- Argon rev1.pdf



3500 Argon 2.9

Housing/frame: in die-cast aluminium with cooling fins integrated into the cover. Diffuser: tempered glass, 4 mm thick, resistant to thermal shocks and impacts. Equipment: complete with connector for quick installation. LED: power factor: 0,9. LED luminous flux maintenance 80%: 50.000h (L80B20). Photobiological safety class: exempt group.

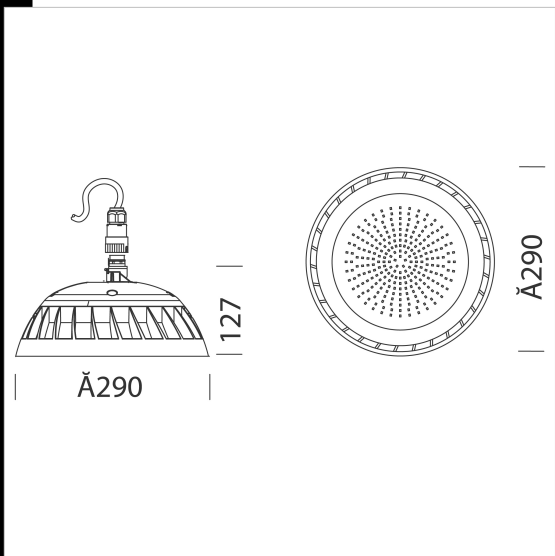

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22350033-00	CLD CELL	3,72	LED-13000lm-4000K-CRI 80	100 W	GRAPHITE
22350033-0034	CLD CELL	8,10	LED-13000lm-5000K-CRI 80	100 W	GRAPHITE

Accessori



- Bracket - Argon 2.9



- Reflector UGR<25 - Argon 2.9



- Bracket with EM box 1h -

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated