




Download

DXF 2D
- argon34.dxf
Montaggi
- Argon rev4.pdf



3500 Argon 3.4

Housing/frame: in die-cast aluminium with cooling fins integrated into the cover. Equipment: complete with connector for quick installation. Diffuser: polycarbonate with concentric rings. Upon request: 60° and 90° version. LED: power factor: 0,9. LED luminous flux maintenance 80%: 50.000h (L80B20). Photobiological safety class: exempt group.

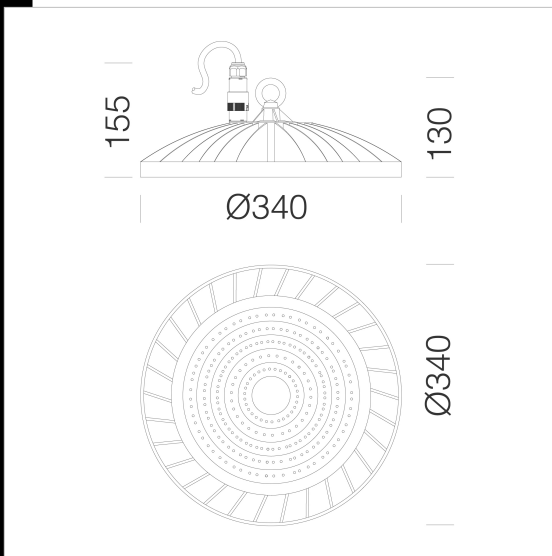

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22350035-00	CLD CELL	3,50	LED-19056lm-4000K-120°-CRI 80	143 W	GRAPHITE
22350035-0034	CLD CELL	3,50	LED-19056lm-5000K-120°-CRI 80	143 W	GRAPHITE
22350036-00	CLD	3,36	LED-26414lm-4000K-120°-CRI 80	190 W	GRAPHITE
22350036-0034	CLD	3,26	LED-26414lm-5000K-120°-CRI 80	190 W	GRAPHITE

Accessori



- Bracket - Argon 3.4



- Reflector UGR<25 - Argon 3.4

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated