




Download

DXF 2D
- argon40.dxf
Montaggi
- Argon_rev1.pdf



3600 Argon 4.0

Housing/frame: in die-cast aluminium with cooling fins integrated into the cover. Diffuser: tempered glass, 4 mm thick, resistant to thermal shocks and impacts. Equipment: complete with connector for quick installation. LED: power factor: 0,9. LED luminous flux maintenance 80%: 50.000h (L80B20). Photobiological safety class: exempt group.

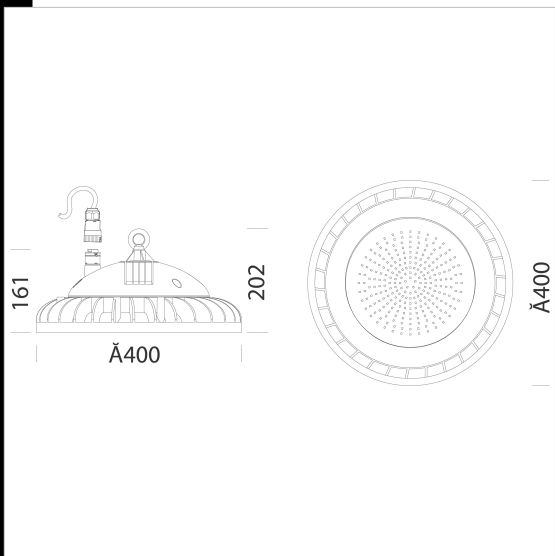

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22360030-00	CLD CELL	9,80	LED-31200lm-4000K-CRI 80	240 W	GRAPHITE
22360030-0034	CLD CELL	9,80	LED-31200lm-5000K-CRI 80	240 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated