


#### Download

DXF 2D  
- vigomic.dxf  
Montaggi  
- VIGO rev1.pdf



#### Vigo Micro - 220/240V

Housing: in die-cast aluminium. Diffuser: tempered glass, resistant to impact and thermal shock. Standard supply: complete with coated bracket and cable gland. LED: Luminous flux maintenance 50.000hr. Power factor 0.9.

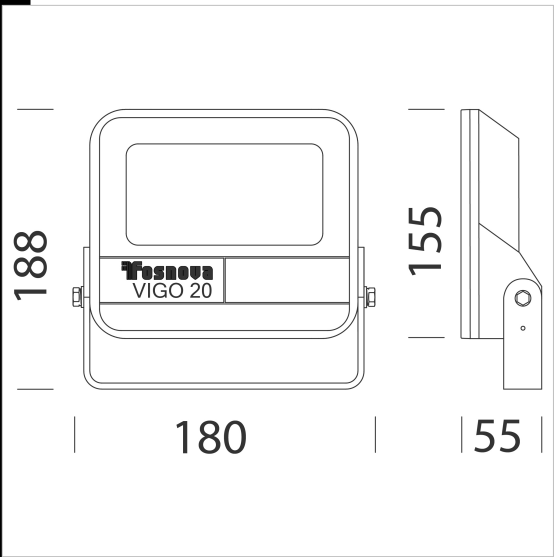

| Code        | Gear     | Kg   | Lumen Output-K-CRI      | WTot | Colour   |
|-------------|----------|------|-------------------------|------|----------|
| 22424071-00 | CLD CELL | 0,83 | LED-2252lm-4000K-CRI>80 | 20 W | GRAPHITE |
| 22424072-00 | CLD CELL | 0,83 | LED-5200lm-4000K-CRI>80 | 50 W | GRAPHITE |

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated