


Download

DXF 2D
- vigomed.dxf
Montaggi
- VIGO rev1.pdf



Vigo Medium - 100/277V

Housing: in die-cast aluminium. Diffuser: tempered glass, resistant to impact and thermal shock Standard supply: complete with coated bracket and cable gland. LED: Luminous flux maintenance 50.000hr. Power factor 0.9.

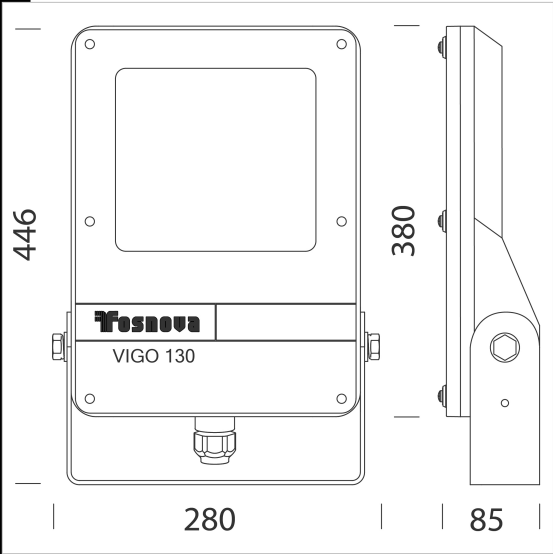

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22424074-00	CLD CELL	5,62	LED-13044lm-4000K-CRI>80	100 W	GRAPHITE
22424075-00	CLD CELL	5,96	LED-15912lm-4000K-CRI>80	130 W	GRAPHITE
22424076-00	CLD CELL	5,96	LED-15912lm-6500K-CRI>80	130 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated