


Download

- DXF 2D
- vigobig.dxf
- Montaggi
- VIGO rev1.pdf



Vigo Big - 100/277V

Housing: in die-cast aluminium. Diffuser: tempered glass, resistant to impact and thermal shock Standard supply: complete with coated bracket and cable gland. LED: Luminous flux maintenance 50.000hr. Power factor 0.9.

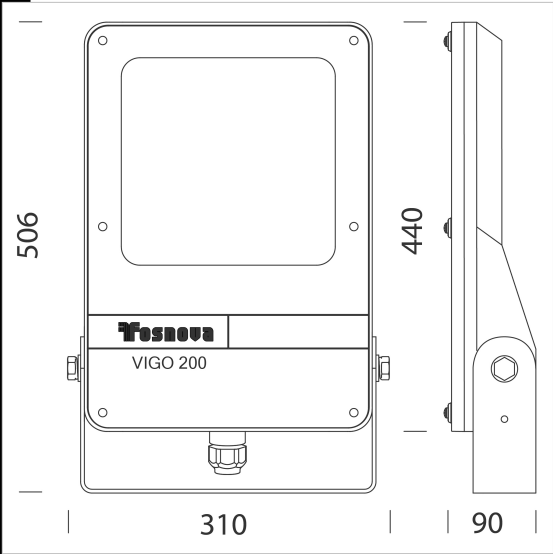

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22424170-00	CLD CELL	8,00	LED-18580lm-4000K-CRI>80	150 W	GRAPHITE
22424270-00	CLD CELL	7,89	LED-24998lm-4000K-CRI>80	200 W	GRAPHITE
22424271-00	CLD CELL	7,92	LED-24998lm-6500K-CRI>80	200 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated