



## Download


- DXF 2D  
- stripip.dxf
- Montaggi  
- STRIP\_LED\_IP65-67 rev3.pdf



## Strip - LED - IP65

LED rows to be applied on smooth, clean and dry surfaces with 3M adhesive. Avoid installation on sharp surfaces and pay attention not to damage components.

The power supply should be purchased separately. \*Note: never cutting strip. The 24V version enables to reduce the section of the electrical cable to cover longer distances. Upon request: dimmable with DMX controller. Lifetime: 25.000h

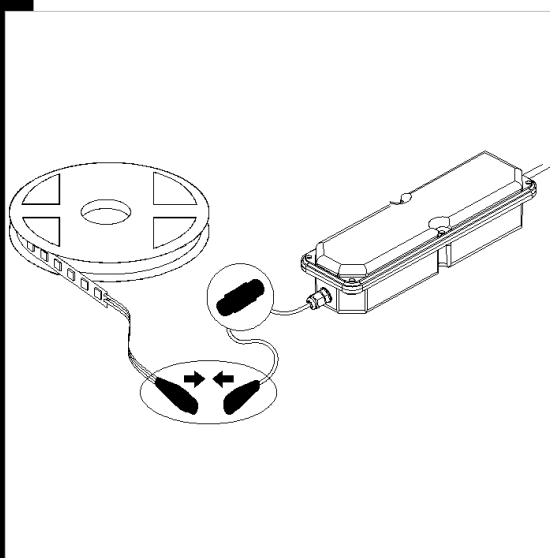

Code	Gear	Kg	Lumen Output-K-CRI	WTot
22485108-00	CLD S+L	0,18	LED strip 120LED/m-24V-1000lm/m-2700K-120°-	60 W
22485116-00	CLD S+L	0,30	LED strip 120LED/m-24V-1050lm/m-3000K-120°-	60 W
22485117-00	CLD S+L	0,15	LED strip 120LED/m-24V-1200lm/m-4000K-120°-	60 W
22485109-00	CLD S+L	0,31	LED strip 120LED/m-24V-1200lm/m-6500K-120°-	60 W

## Accessori



- Plug connector wire - Strip-LED



- Driver IP20-IP65-IP67 LED -

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated