



Download


DXF 2D
- strip.dxf



Strip - LED - IP20 - CRI 95

LED rows to be applied on smooth, clean and dry surfaces with 3M adhesive. Avoid installation on sharp surfaces and pay attention not to damage components. Rows can be cut along the cutting lines.

The power supply should be purchased separately. *Note: never use scissors for cutting, use a cutter instead. To ensure proper operation and the correct IP level, restore the strip cabling to the original configuration (use cable connectors if necessary). This note applies to all LED strips. The 24V version enables to reduce the section of the electrical cable to cover longer distances. Lifetime: 36.000h

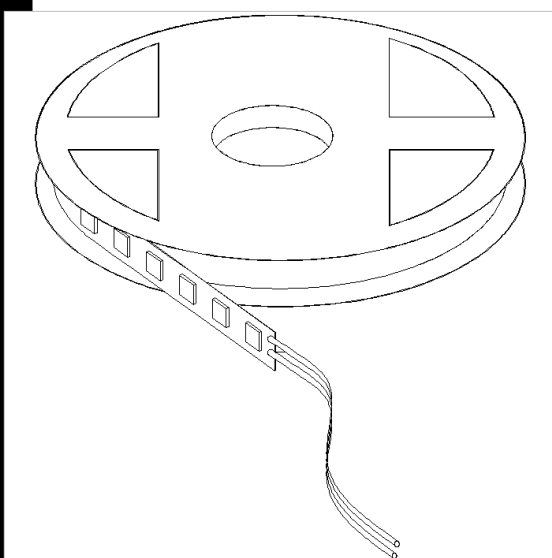

Code	Gear	Kg	Lumen Output-K-CRI	WTot
22486050-00	CLD S+L	0,11	LED 6W/m-907lm/m-4000K-CRI 95	30 W
22486050-39	CLD S+L	0,11	LED 6W/m-900lm/m-3000K-CRI 95	30 W
22486051-00	CLD S+L	0,11	LED 12W/m-1812lm/m-4000K-CRI 95	60 W
22486051-39	CLD S+L	0,11	LED 12W/m-1800lm/m-3000K-CRI 95	60 W
22486052-00	CLD S+L	0,11	LED 16W/m-2416lm/m-4000K-CRI 95	80 W
22486052-39	CLD S+L	0,11	LED 16W/m-2400lm/m-3000K-CRI 95	80 W
22486053-00	CLD S+L	0,11	LED 19,2W/m-2918lm/m-4000K-CRI 95	96 W
22486053-39	CLD S+L	0,11	LED 19,2W/m-2880lm/m-3000K-CRI 95	96 W

Accessori



- Continuous line connector - Strip-LED IP20



- Corners connector - Strip-LED IP20



- Plug connector wire - Strip-LED IP20



- Driver for Strip LED IP20

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated