


Download

DXF 2D
- stelobas flex.dxf



Stelo FLEX - MASTERLED 7w 220-240V

A line of decorative fixtures designed to be installed on wall mounted.
Housing: Adjustable angle, made of aluminium
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

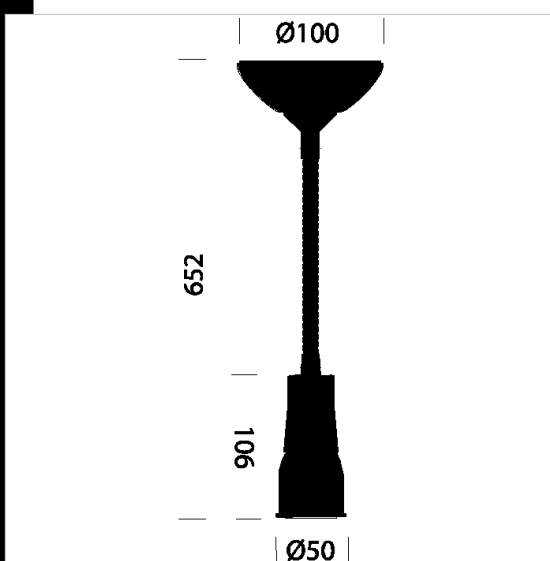

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Base	Colour
22605265-00	CLD CELL-D	0.70	MASTERLED-1400cd-3000K-25°-CRI 80	6 W	GU10	CHROME

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated