


Housing: Die-cast aluminium with cooling holes.  
Reflector: in die-cast aluminium, high efficiency and anti-glare.  
Coating: Power-coated with a UV-resistant polyester paint.  
Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.  
Luminous flux maintenance 80%: 50.000h (L80B20).  
Power factor >0.95  
Photobiological safety class: exempt group EN62471.  
design: A.Pedretti (Studio Rota & partner)  
DALI dimmable version -1241 -6841 to be used with OMNITRACK PLUS track-mounted system.



DXF 2D  
- 703710.dxf

Montaggi  
- VISION2.0 rev7.pdf

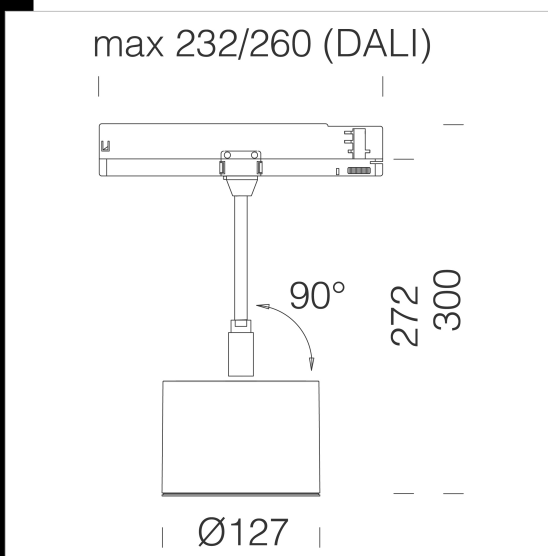

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22703710-00	CLD CELL	0.69	LED COB-3761lm-3000K-74°-CRI 92	39 W	WHITE
22703730-00	CLD CELL	0.69	LED COB-3761lm-3000K-74°-CRI 92	39 W	BLACK
22703770-00	CLD CELL	0.69	LED COB-3761lm-3000K-74°-CRI 92	39 W	SILVER
22703710-68	CLD CELL	0.69	LED COB-4024lm-4000K-74°-CRI 92	39 W	WHITE
22703730-68	CLD CELL	0.69	LED COB-4024lm-4000K-74°-CRI 92	39 W	BLACK
22703770-68	CLD CELL	0.69	LED COB-4024lm-4000K-74°-CRI 92	0 W	SILVER

Contact the Consulting and design Centre for any lighting information.