

Download


DXF 2D
- vis sos big.dxf

Montaggi
- VISION 2.0 rev8.pdf



Vision 2.0 big - Suspension

Housing: Die-cast aluminium with cooling holes.
Reflector: in die-cast polished aluminium, high efficiency and anti-glare.
Coating: Power-coated with a UV-resistant polyester paint.
Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.
Luminous flux maintenance 80%: 50.000h (L80B20).
Power factor >0.9
Photobiological safety class: exempt group EN62471.
Equipment: complete with cable (L = 2.50m) and ceiling rose for suspension.

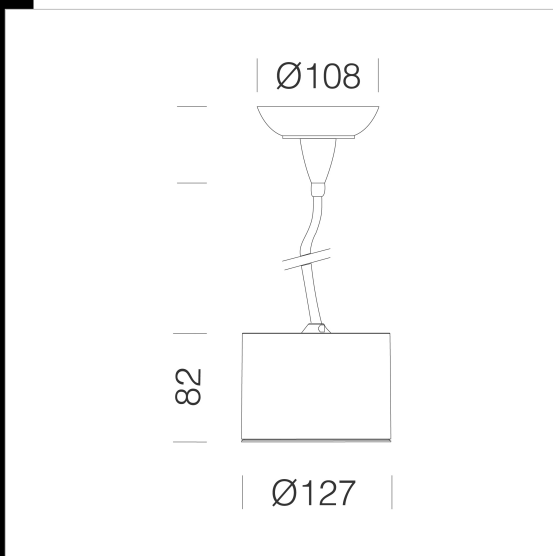

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22703312-00	CLD	2.01	LED-2012lm-3000K-76°-CRI>80	30 W	WHITE
22703332-00	CLD	2.01	LED-2012lm-3000K-76°-CRI>80	30 W	BLACK
22703372-00	CLD	2.01	LED-2012lm-3000K-76°-CRI>80	30 W	SILVER
22703313-00	CLD	0.90	LED-2153lm-4000K-76°-CRI>80	30 W	WHITE
22703333-00	CLD	2.01	LED-2153lm-4000K-76°-CRI>80	30 W	BLACK
22703373-00	CLD	2.01	LED-2153lm-4000K-76°-CRI>80	30 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated