




## Vision 2.0 big L - Suspension

Housing: Die-cast aluminium with cooling holes.  
 Reflector: in die-cast polished aluminium, high efficiency and anti-glare.  
 Coating: Power-coated with a UV-resistant polyester paint.  
 Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.  
 Luminous flux maintenance 80%: 50.000h (L80B20).  
 Power factor >0.9  
 Photobiological safety class: exempt group EN62471.  
 Equipment: complete with cable (L = 2.50m) and ceiling rose for suspension.

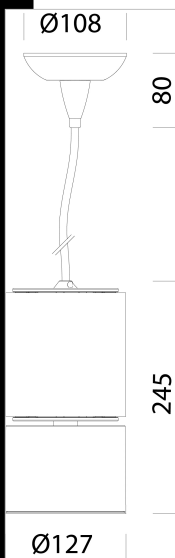

### Download

DXF 2D  
 - vis2sosp.dxf  
 Montaggi  
 - VISION 2.0 rev8.pdf  
 BIM  
 - Vision 2.0 - Suspension - 20200306.zip

| Code          | Gear    | Kg   | Lumen Output-K-CRI                | WTot | Colour |
|---------------|---------|------|-----------------------------------|------|--------|
| 22703310-00   | CLD     | 2,01 | LED COB-5031lm-3000K-78°-CRI 92   | 53 W | WHITE  |
| 22703330-00   | CLD     | 2,00 | LED COB-5031lm-3000K-78°-CRI 92   | 53 W | BLACK  |
| 22703370-00   | CLD     | 2,02 | LED COB-5031lm-3000K-78°-CRI 92   | 53 W | SILVER |
| 22703311-00   | CLD     | 2,02 | LED COB-5296lm-4000K - 78°-CRI 92 | 53 W | WHITE  |
| 22703331-00   | CLD     | 2,02 | LED COB-5296lm-4000K - 78°-CRI 92 | 53 W | BLACK  |
| 22703371-00   | CLD     | 2,02 | LED COB-5296lm-4000K - 78°-CRI 92 | 53 W | SILVER |
| 22703310-1241 | CLD-D-D | 2,36 | LED COB-5031lm-3000K-74°-CRI>90   | 53 W | WHITE  |
| 22703330-1241 | CLD-D-D | 2,30 | LED COB-5031lm-3000K-74°-CRI>90   | 53 W | BLACK  |
| 22703370-1241 | CLD-D-D | 2,02 | LED COB-5031lm-3000K-74°-CRI>90   | 53 W | SILVER |
| 22703311-1241 | CLD-D-D | 2,38 | LED COB-5296lm-4000K-74°-CRI>90   | 53 W | WHITE  |
| 22703331-1241 | CLD-D-D | 2,02 | LED COB-5296lm-4000K-74°-CRI>90   | 53 W | BLACK  |
| 22703371-1241 | CLD-D-D | 2,30 | LED COB-5296lm-4000K-74°-CRI>90   | 53 W | SILVER |

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated