



Download


DXF 2D
- visblindo.dxf

Montaggi
- VISION 2.0 rev8.pdf



Vision 2.0 big L - sospensione per busbar

Housing: Die-cast aluminium with cooling holes.
Reflector: in die-cast polished aluminium, high efficiency and anti-glare.
Coating: Power-coated with a UV-resistant polyester paint.
Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.
Luminous flux maintenance 80%: 50.000h (L80B20).
Power factor >0.9
Photobiological safety class: exempt group EN62471.
Equipment: complete with suspension and safety cable (L=1.20 m) with jamming cord grip for mounting bracket (not included) and electrical cable with connecting plug.

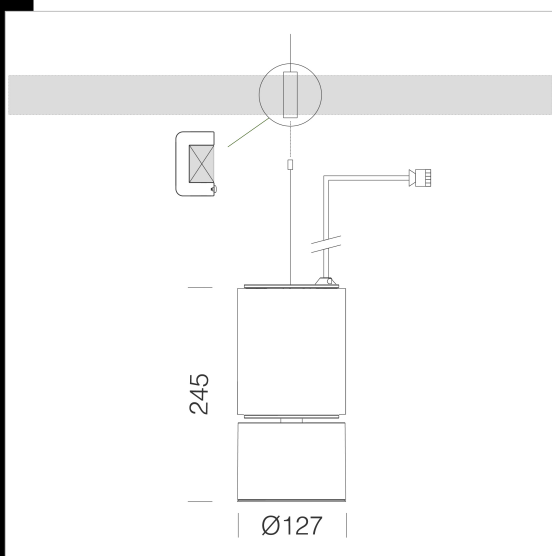

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22703314-00	CLD	2,01	LED COB-5217lm-3000K-74°-CRI>90	53 W	WHITE
22703334-00	CLD	2,01	LED COB-5217lm-3000K-74°-CRI>90	53 W	BLACK
22703374-00	CLD	2,01	LED COB-5217lm-3000K-74°-CRI>90	53 W	SILVER
22703314-1241	CLD-D-D	2,01	LED COB-5217lm-3000K-74°-CRI>90	53 W	WHITE
22703334-1241	CLD-D-D	2,01	LED COB-5217lm-3000K-74°-CRI>90	53 W	BLACK
22703374-1241	CLD-D-D	2,01	LED COB-5217lm-3000K-74°-CRI>90	53 W	SILVER
22703315-00	CLD	2,01	LED COB-5592lm-4000K-74°-CRI>90	53 W	WHITE
22703335-00	CLD	2,01	LED COB-5592lm-4000K-74°-CRI>90	53 W	BLACK
22703375-00	CLD	2,01	LED COB-5592lm-4000K-74°-CRI>90	53 W	SILVER
22703315-1241	CLD-D-D	2,01	LED COB-5592lm-4000K-74°-CRI>90	53 W	WHITE
22703335-1241	CLD-D-D	2,01	LED COB-5592lm-4000K-74°-CRI>90	53 W	BLACK
22703375-1241	CLD-D-D	2,01	LED COB-5592lm-4000K-74°-CRI>90	53 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated