



Download

DXF 2D
- 703110.dxf


Montaggi
- vision2.0.pdf

BIM
- Vision 2.0 small - Tiges - Universal
adapter - 20200306.zip



Vision 2.0 small - Tiges - Universal adapter

Housing: Die-cast aluminium with cooling holes.
Reflector: in die-cast aluminium, high efficiency and anti-glare.
Coating: Power-coated with a UV-resistant polyester paint.
Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.
Luminous flux maintenance 80%: 50.000h (L80B20).
Power factor >0.95
Photobiological safety class: exempt group EN62471.
design: A.Pedretti (Studio Rota & partner)

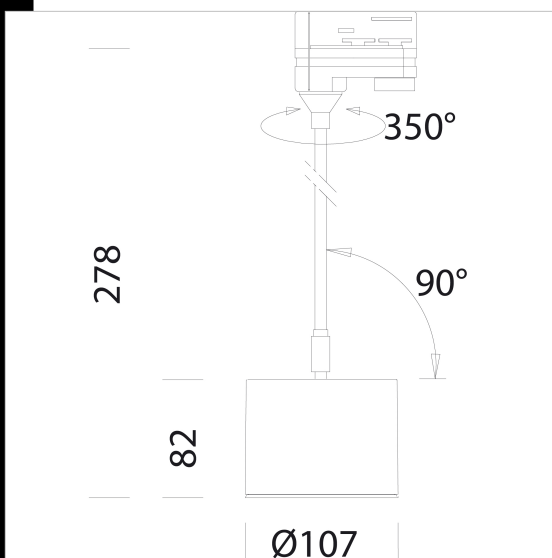

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated