




Vision 2.0 big - tiges - short - universal adapter


Housing: Die-cast aluminium with cooling holes.
Reflector: in die-cast aluminium, high efficiency and anti-glare.
Coating: Power-coated with a UV-resistant polyester paint.
Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.
Luminous flux maintenance 80%: 50.000h (L80B20).
Power factor >0.95
Photobiological safety class: exempt group EN62471.
design: A.Pedretti (Studio Rota & partner)
DALI dimmable version -1241 -6841 to be used with OMNITRACK PLUS track-mounted system.

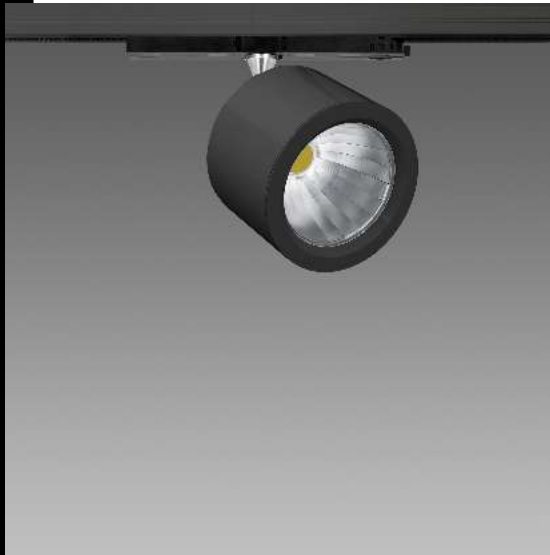

Download

DXF 2D
- 703910.dxf

Montaggi
- VISION 2.0 rev8.pdf

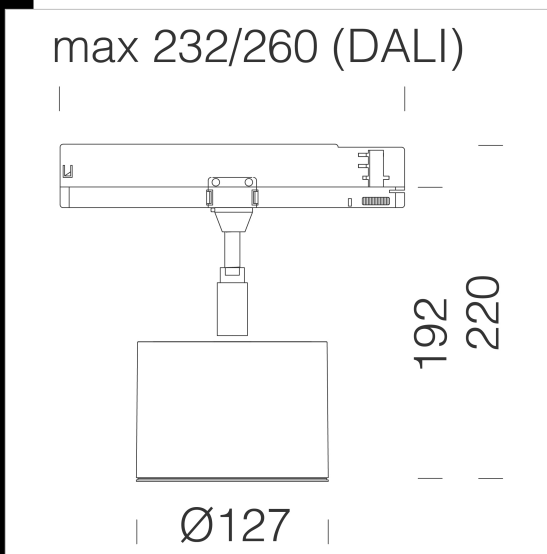

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22703910-00	CLD	1,00	LED COB-3869lm-3000K-74°-CRI>90	39 W	WHITE
22703930-00	CLD	1,17	LED COB-3869lm-3000K-74°-CRI>90	39 W	BLACK
22703970-00	CLD	1,00	LED COB-3869lm-3000K-74°-CRI>90	39 W	SILVER
22703910-68	CLD	1,17	LED COB-4073lm-4000K-74°-CRI>90	39 W	WHITE
22703930-68	CLD	0,96	LED COB-4073lm-4000K-74°-CRI>90	39 W	BLACK
22703970-68	CLD	0,69	LED COB-4073lm-4000K-74°-CRI>90	39 W	SILVER

Accessori



- Alveolar screen



- Acc. recessed



- Acc. base for universal adapter and DIMM 1/10V-DALI adapter

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W_{tot} column indicates the total wattage absorbed by the system without exceeding 10% of the indicated