



**Download**

DXF 2D  
- 710272.dxf



## Leo 3 - Universal adapter

Housing: Die cast aluminium with openable frame designed with bayonet coupling to allow easy lamp maintenance.

Reflector: Mirror-finish, faceted aluminium for the CDM-TC versions.

Painting: Acrylic resin based UV resistant powder paint.

Lampholder: Ceramic and with silver-plated contacts.


Wiring: 230 V/50 Hz power supply with electronic ballast or 12 V transformer.

Silicon insulated wire with glass fibre braid, cross-section 1.0 mm<sup>2</sup>.

Equipment: supplied complete with adjustable bracket (on vertical axis with

355° rotation) in die cast aluminium providing internal passage for wires.

Standards: Products comply with EN 60598-1-CEI 34.21 standards, with level of protection in accordance with EN 60529 standards.

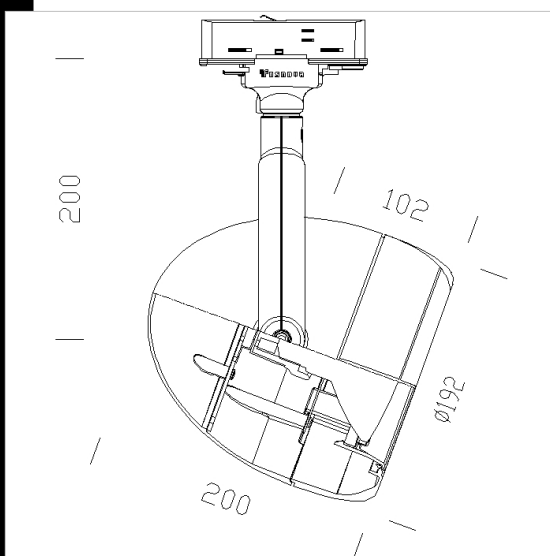

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22710272-00	S+L	1,75	ALO-PAR30 75W-888lm-3000K-	75 W	E27	ARGENTO
22710212-00	S+L	1,75	ALO-PAR30 75W-888lm--	75 W	E27	BIANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated