




Download
DXF 2D
- 802813.dxf

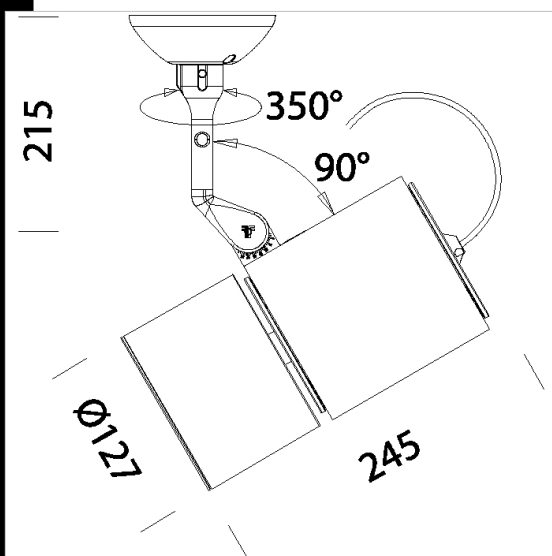

Vision 2.0 big L - PREMIUM - Long - base version

In different commercial sectors lighting systems should meet specific requirements, such as for example, emphasise the colour of food or create the right setting for displaying garments, household articles as well as the most exclusive items. All this can be achieved with the new COB LED technology available in Premium that, thanks to a larger gamut area, will make: • whites look cleaner and brighter, eliminating the yellow hue of the traditional LEDs, making them closer to the human perception of "pure white" (below the BBL - "Black Body Line" - fig.1). • colours look more saturated, guaranteeing greater recognisability and as a consequence improving the appearance and characteristics of the wares on display.

A new family of floodlights covering the widest range of sources and lighting design needs for perfect optical control of the light beams.

A series of fixtures designed to satisfy the most widely differing architectural lighting and display needs, with performance in mind and using the most innovative light sources to ensure excellent visual comfort.

The highest performance components are contained in an extruded aluminium housing with through chambers which permit optimised heat exchange by conductive and convective dispersion thus increasing the performance and reliability of the floodlights. The movable L-shaped supporting rod permits optimised balancing of the fixture whatever its configuration.

The direction can be precisely controlled and the light beam accurately aimed using the radial micrometric scale.

Modern lighting design increasingly often demands excellent aesthetic results. When a product maintains the same aesthetic design, it becomes increasingly important to have various types of light source to choose from. Vision has thus been created to satisfy any need. In fact, a single housing guarantees application continuity even when using different optical units and lamps, and is ideal for use in places where, when accent lighting is required, the quality of the light output must be differentiated.

Housing: Die-cast aluminium with cooling holes.

Reflector: in die-cast aluminium, high efficiency and anti-glare.

Coating: Power-coated with a UV-resistant polyester paint.

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

LED COB 42W - 3000K - 4700lm CRI 90 BELOW BBL - 45°

Luminous flux maintenance 80%: 50.000h (L80B20).

Power factor >0.95

Photobiological safety class: exempt group EN62471.

design: A.Pedretti (Studio Rota & partner)

Code	Gear	Kg	Watt	Base	Lamps	Colour
22802913-05	CLD CELL	2,15	LED COB 42W		4700lm-3000K-CRI>90 below bbl	WHITE
22802933-05	CLD CELL	2,15	LED COB 42W		4700lm-3000K-CRI>90 below bbl	BLACK
22802973-05	CLD CELL	2,32	LED COB 42W		4700lm-3000K-CRI>90 below bbl	SILVER