

Vision 2.0 small VIVID - short - Base version



A new family of floodlights covering the widest range of sources and lighting design needs for perfect optical control of the light beams. A series of fixtures designed to satisfy the most widely differing architectural lighting and display needs, with performance in mind and using the most innovative light sources to ensure excellent visual comfort.

The highest performance components are contained in an extruded aluminium housing with through chambers which permit optimised heat exchange by conductive and convective dispersion thus increasing the performance and reliability of the floodlights. The movable L-shaped supporting rod permits optimised balancing of the fixture whatever its configuration.

The direction can be precisely controlled and the light beam accurately aimed using the radial micrometric scale.

Modern lighting design increasingly often demands excellent aesthetic results. When a product maintains the same aesthetic design, it becomes increasingly important to have various types of light source to choose from. Vision has thus been created to satisfy any need. In fact, a single housing guarantees application continuity even when using different optical units and lamps, and is ideal for use in places where, when accent lighting is required, the quality of the light output must be differentiated.

Housing: Die-cast aluminium with cooling holes.

Reflector: in die-cast aluminium, high efficiency and anti-glare.

Coating: Power-coated with a UV-resistant polyester paint.


Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

Luminous flux maintenance 80%: 50.000h (L80B20).


Power factor >0.95

Photobiological safety class: exempt group EN62471.

design: A.Pedretti (Studio Rota & partner)

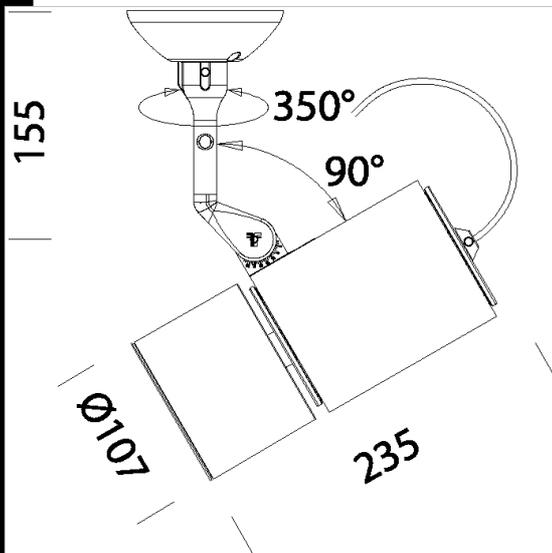

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22802810-00	CLD CELL	1.82	LED COB VIVID-2770lm-3000K-44°-CRI>95	34 W	BIANCO
22802830-00	CLD CELL	1.76	LED COB VIVID-2770lm-3000K-44°-CRI>95	34 W	NERO
22802870-00	CLD CELL	1.82	LED COB VIVID-2770lm-3000K-44°-CRI>95	34 W	ARGENTO
22802810-12	CLD CELL-D	1.75	LED COB VIVID-2770lm-3000K-44°-CRI>95	34 W	BIANCO
22802830-12	CLD CELL-D	1.75	LED COB VIVID-2770lm-3000K-44°-CRI>95	34 W	NERO
22802870-12	CLD CELL-D	1.75	LED COB VIVID-2770lm-3000K-44°-CRI>95	34 W	ARGENTO
22802810-1241	CLD CELL-D-D	1.73	LED COB-2662lm-3000K-44°-CRI 92	26 W	BIANCO
22802830-1241	CLD CELL-D-D	1.72	LED COB-2662lm-3000K-44°-CRI 92	26 W	NERO
22802870-1241	CLD CELL-D-D	1.83	LED COB-2662lm-3000K-44°-CRI 92	26 W	ARGENTO
22802810-68	CLD CELL	1.74	LED COB VIVID-3885lm-4000K-44°-CRI>95	34 W	BIANCO
22802830-68	CLD CELL	1.80	LED COB VIVID-3885lm-4000K-44°-CRI>95	34 W	NERO
22802870-68	CLD CELL	1.80	LED COB VIVID-3885lm-4000K-44°-CRI>95	34 W	ARGENTO
22802810-1213	CLD CELL-D	1.80	LED COB VIVID-3885lm-4000K-44°-CRI>95	34 W	BIANCO
22802830-1213	CLD CELL-D	1.80	LED COB VIVID-3885lm-4000K-44°-CRI>95	34 W	NERO
22802870-1213	CLD CELL-D	1.80	LED COB VIVID-3885lm-4000K-44°-CRI>95	34 W	ARGENTO
22802810-6841	CLD CELL-D-D	1.80	LED COB-2848lm-4000K-44°-CRI 92	26 W	BIANCO
22802830-6841	CLD CELL-D-D	1.72	LED COB-2848lm-4000K-44°-CRI 92	26 W	NERO
22802870-6841	CLD CELL-D-D	1.80	LED COB-2848lm-4000K-44°-CRI 92	26 W	ARGENTO
22803510-00	CLD CELL	1.75	LED COB-3631lm-3000K-44°-CRI 92	34 W	BIANCO
22803530-00	CLD CELL	1.82	LED COB-3631lm-3000K-44°-CRI 92	34 W	NERO
22803570-00	CLD CELL	1.76	LED COB-3631lm-3000K-44°-CRI 92	34 W	ARGENTO
22803510-12	CLD CELL-D	1.75	LED COB-3631lm-3000K-44°-CRI 92	34 W	BIANCO
22803530-12	CLD CELL-D	1.73	LED COB-3631lm-3000K-44°-CRI 92	34 W	NERO
22803570-12	CLD CELL-D	1.82	LED COB-3631lm-3000K-44°-CRI 92	34 W	ARGENTO
22803510-1241	CLD CELL-D-D	1.80	LED COB-3631lm-3000K-44°-CRI 92	26 W	BIANCO
22803530-1241	CLD CELL-D-D	1.80	LED COB-3631lm-3000K-44°-CRI 92	26 W	NERO
22803570-1241	CLD CELL-D-D	1.80	LED COB-3631lm-3000K-44°-CRI 92	26 W	ARGENTO
22803510-68	CLD CELL	1.80	LED COB-3885lm-4000K-44°-CRI 92	34 W	BIANCO
22803530-68	CLD CELL	1.80	LED COB VIVID-3885lm-4000K-44°-CRI>95	26 W	NERO
22803570-68	CLD CELL	1.80	LED COB VIVID-3885lm-4000K-44°-CRI>95	26 W	ARGENTO
22803510-1213	CLD CELL-D	1.80	LED COB-3885lm-4000K-44°-CRI 92	34 W	BIANCO
22803530-1213	CLD CELL-D	1.80	LED COB-3885lm-4000K-44°-CRI 92	34 W	NERO

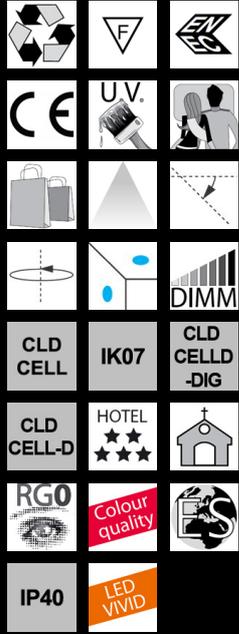

Download

DXF 2D
- 802810.dxf

Montaggi
- vision2.0.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Vision 2.0 small VIVID - short - Base version

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22803570-1213	CLD CELL-D	1.80	LED COB-3885lm-4000K-44°-CRI 92	34 W	ARGENTO
22803510-6841	CLD CELL-D-D	1.80	LED COB-3885lm-4000K-44°-CRI 92	34 W	BIANCO
22803530-6841	CLD CELL-D-D	1.80	LED COB-3885lm-4000K-44°-CRI 92	34 W	NERO
22803570-6841	CLD CELL-D-D	1.80	LED COB-3885lm-4000K-44°-CRI 92	34 W	ARGENTO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated