



3° IP
IK


Download

DXF 2D
- 6319.dxf



6319 reflector with louvre

Laminated polished aluminum, for use with the accessory 6316. for the equipment is monaural or two lamps

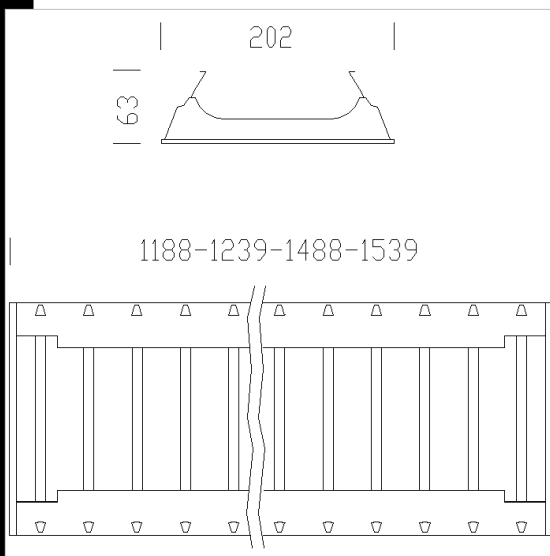

| Code | Kg | Lumen-K-CRI | WTot | Base | Colour |
|-----------|------|----------------------------|------|------|-----------|
| 237422-00 | 1.71 | FL 28/54--- | 0 W | | ALLUMINIO |
| 237425-00 | 1.65 | FL 1x58-5200lm-4000K-Ra 1b | 0 W | G13 | ALLUMINIO |
| 237423-00 | 1.71 | FL 36--- | 0 W | | ALLUMINIO |
| 237424-00 | 1.65 | FL 35/49/80--- | 0 W | | ALLUMINIO |

Products



- 6301 Elesystem T8



- 6311 Elesystem T8



- 6315 Elesystem T5



- 6305 Elesystem T5

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated