



IK07 IP40

Download

DXF 2D
- d6501.dxf
Montaggi
- 6401_501_rapidssystem_tn.pdf



6501 Rapid System - with knife switch

Housing: In rolled hot-dip galvanized steel, with rounded edges to protect hands and with end caps in polycarbonate.

Painting: Steel stove pre-enameilling with white polyester resin, UV-stabilized, anti-yellowing, upon phosphate treatment.

Lampholder: In white polycarbonate, with contacts in phosphor bronze, quick connection, with protective collars to prevent lamp from falling. Socket G13.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Standard supply: Nylon ratchet fastener.

Mounting: On track, directly to ceiling or wall.


Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK07 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ).

These products can be installed on normally inflammable surfaces.

Additional gear: Electronic ballast. Emergency kit.


Emergency light version: If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.

Special electric gear: Electronic ballast. Emergency kit. Only for 6401/6501 version without acc 6405.

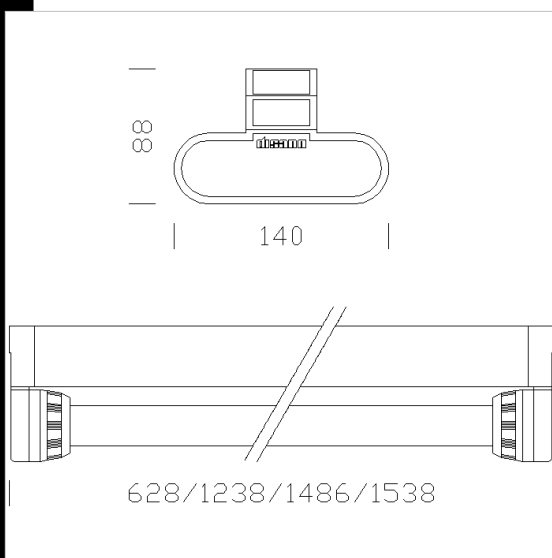

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
238045-08	CEL	1.12	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	WHITE
237536-00	CEL	1.30	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
237537-00	CEL	1.27	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	WHITE

Accessories

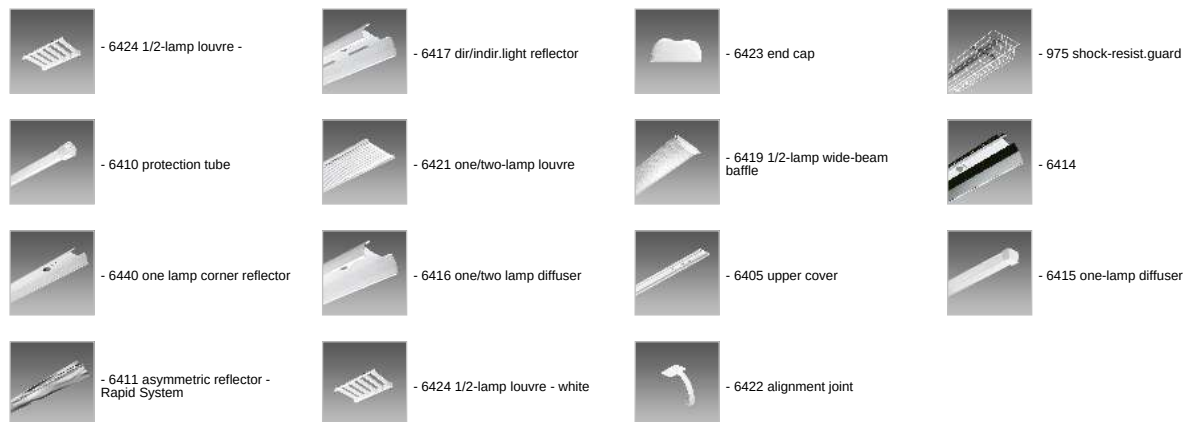

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated