


6401 Rapid System - with knife switch

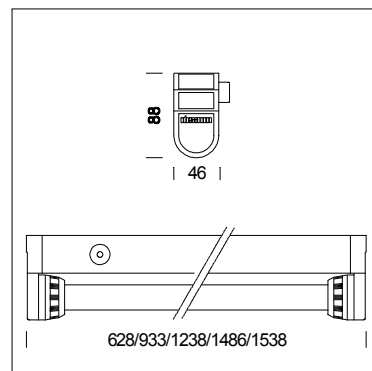

| Code | Gear | Kg | Colour | lamp |
|-----------|-------|------|--------|--------------------------------|
| 238040-00 | CNR | 1.10 | white | FL 1x18-G13-1350lm-4000K-Ra 1b |
| 238041-00 | CNR | 1.30 | white | FL 1x30-G13-2350lm-4000K-Ra 1b |
| 238042-00 | CNR | 1.50 | white | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 238043-00 | CNR | 2.00 | white | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 237531-00 | CEL | 1.40 | white | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 237532-00 | CEL | 1.80 | white | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 237551-00 | CNR-E | 2.50 | white | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 237552-00 | CNR-E | 2.80 | white | FL 1x58-G13-5200lm-4000K-Ra 1b |

Housing: In rolled hot-dip galvanized steel, with rounded edges to protect hand and with end caps in polycarbonate.

Painting: Steel stove pre-enamelling with white polyester resin, UV-stabilized, anti-yellowing, upon phosphate treatment.

Lampholder: In white polycarbonate, with contacts in phosphor bronze, quick connection, with protective collars to prevent lamp from falling. Socket G13.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Standard supply: Nylon ratchet fastener.

Mounting: On track, directly to ceiling or wall.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK07 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ).

These products can be installed on normally inflammable surfaces.

Additional gear: Electronic ballast. Emergency kit.

Emergency light version: If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.