


6403 Rapid System - with upper cover

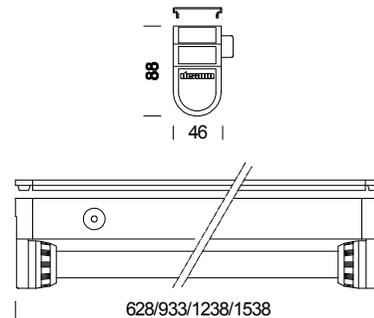

Code	Gear	Kg	Colour	lamp
238120-00	CN	1.20	white	FL 1x18-G13-1350lm-4000K-Ra 1b
238121-00	CN	1.50	white	FL 1x30-G13-2350lm-4000K-Ra 1b
238122-00	CN	1.70	white	FL 1x36-G13-3350lm-4000K-Ra 1b
238123-00	CN	2.10	white	FL 1x58-G13-5200lm-4000K-Ra 1b

Housing: In rolled hot-dip galvanized steel, with rounded edges to protect hand and with end caps in polycarbonate.

Painting: Steel stove pre-enamelling with white polyester resin, UV-stabilized, anti-yellowing, upon phosphate treatment.

Lampholder: In white polycarbonate, with contacts in phosphor bronze, quick connection, with protective collars to prevent lamp from falling. Socket G13.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Standard supply: Nylon ratchet fastener.

Equipment: Complete with power supply terminal block and upper cover (acc. 6405) for installation directly on ceiling or wall.

Mounting: Ceiling or wall.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK07 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ).

These products can be installed on normally inflammable surfaces.

Additional gear: Electronic ballast. Emergency kit.

Emergency light version: If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically

Special electric gear: Electronic ballast. Emergency kit. Only for 6401/6501 version without acc 6405.