


1659 Iris bike trails

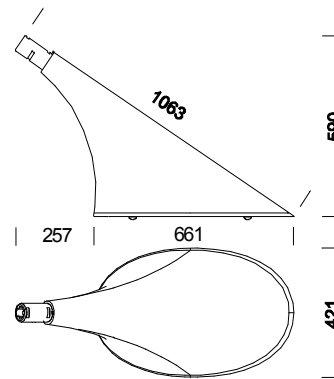

Code	Gear	Kg	Colour	Dimensions	lamp
314230-00	CNR-L	12.30	met. silver	1063x421x661	SAP-T 70-E27-6000lm-2000K-Ra 4

Housing: Made of die-cast aluminium.

Reflector: LIGHT POLLUTION PREVENTING OPTIC UNIT. Bike trail version made of polished aluminium

Diffuser: Tempered glass 4 mm thick, resistant to impact and thermal shock (UNI EN 1250-1: 2001 tests).

Coating: In several stages. First stage: epoxy cationic electrocoating, resistant to corrosive and saline environments. The second stage is a UV stabilizing priming. Lastly, a rough finish with metallised silver acrylic coating is applied.

Lampholder: Ceramic with silver-plated contacts

Electric gear: 230V-50Hz power supply with heat protection. Flexible wire terminated with admiralty brass clamps; silicone insulation; cross-section: 1 sqmm . 2P terminal block (maximum allowed lead cross section 2.5 sqmm.)

Standard supply: Electric gear on a removable tray with quick connectors for line and lampholder connection. With anti-condensate filter.

Regulations: Manufactured in compliance with applicable EN 60598 standards. The level of protection complies with the EN60529 standard.