



1782 Astro HP - high performance

Lights with great aesthetic quality, superior energy-efficiency and long life: in order to obtain the best from the new lighting technology, lighting systems need the technical requirements and the reliability of state-of-the-art fixtures, such as the ones designed by Disano, a company with over fifty years of experience in the lighting sector.

Astro was created to meet these criteria and is available in three different versions: for interiors, centre-road application and as a spotlight.

Simple and linear aesthetics combines with a sophisticated technology to offer exceptional technical performance: Astro was designed to take the best from all the potential of the new LED lights

Quality materials and the fixture's high reliability, as always guaranteed by Disano, are a safe investment.

The product offers the possibility to choose the correct drive current for LEDs and have the right power under specific design conditions

Housing: in die-cast aluminium with cooling fins integrated into the cover.

Diffuser: tempered glass, 4 mm thick, resistant to thermal shocks and impacts (UNI-EN 12150-1: 2001).

Coating: the standard powder coating consists of a first metal surface pre-treatment stage and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating.

Standard supply: device for automatic temperature control. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547. It works in two modes: - differential mode: surge between power cables and between the phase and neutral. - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole. Upon request: protection up to 10KV. Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments. Heat sink: the heat dissipation system is specially designed and made to allow the operation of the LED lights with temperatures below 50° (Tj = 85°), thus guaranteeing excellent performance/efficiency and durability.

The possibility to choose the correct drive current for LEDs. Using a lower current will improve the efficiency of fixtures and therefore increase energy saving.

Optics: in PMMA, highly resistant to temperature and UV radiation
LED: Latest generation LED technology, Ta-30 + 35°C life 90%: 100000h (L90B10).

Photobiological safety class: exempt group EN62471.
Upon request:
- with power supply DIG dimmable with subcode 0041.
- with virtual midnight subcode 30.
- power line carrier remote control systems subcode 0078.

Wind surface:
ø462 : L=551cm2 - F1715cm2 ø512 : L=607cm2 - F=2100cm2

Download

DXF 2D


- 1782.dxf

Montaggi

- astro hp-he 02-21.pdf

BIM

- 1782 Astro HP - high performance - 20200303.zip

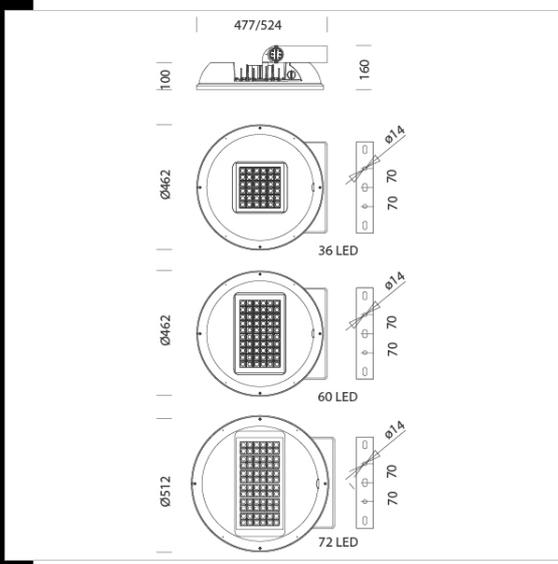

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
320000-00	CLD	9,68	LED-15131lm-4000K-60°-CRI 80	109 W	GRAPHITE	4kV
320001-00	CLD	9,73	LED-17816lm-4000K-60°-CRI 80	139 W	GRAPHITE	4kV
320002-00	CLD	10,36	LED-23236lm-4000K-60°-CRI 80	177 W	GRAPHITE	4kV
320003-00	CLD	11,83	LED-34987lm-4000K-60°-CRI 80	258 W	GRAPHITE	4/6kV
320004-00	CLD	11,81	LED-33295lm-4000K-30°-CRI 80	258 W	GRAPHITE	4/6kV
320005-00	CLD	11,73	LED-34601lm-4000K-90°-CRI 80	258 W	GRAPHITE	4/6kV

Accessori



- 24 protective guard

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated