

Download

DXF 2D
- 1104.dxf
Montaggi
- 1103_4_nikos.pdf



1104 Nikos - asymmetric

Housing: In sheet steel.

Reflector: Asymmetric in pressed prismatic 99.85 anodized, polished.

Painting: Spray coated with a UV-stabilised acrylic water-based paint, resistant to humidity, UV-stabilized, anti-yellowing.

Lampholder: In ceramics, with silver-plated contacts.

Electric gear: 230V/50Hz power supply. Silicone flexible, with fiberglass braid, 1.5 sqmm cross section. Nylon 2P+T terminal block with maximum allowed lead cross section of 4 sqmm.

Upper plate: In steel, with socket/plug terminal.

Accessories: Possible installation of a tempered protective glass, acc.1183, thermal shock and impact resistant, as an alternative to the protective guard.


Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP40IK08 high degree of protection according to EN60529 standards. Moreover, these products can be installed on normally inflammable surfaces.

Note: For optimal operation of industrial luminaires supplied without lamp (CNR) we recommend the use of the suitable lamps

1104 Nikos JM-T400 3.25A; 0.6-1.0 KV

1104 Nikos JM-T/SAP-T250 3A; 3.5-4.5KV

We recommend the use suitable accessoires (acc.1187/8)

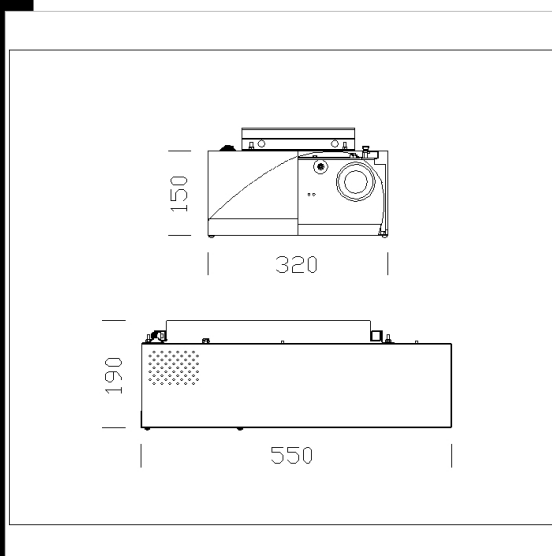

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
321571-00	CNR	13.50	CDM-T MW 360---	387 W	E40	WHITE
321570-01	CNR	0.00	CDM-T MW 230 / SAP-T 250---	245 W	E40	WHITE
321571-01	CNR	0.00	CDM-T MW 360---	0 W	E40	WHITE
321570-00	CNR	8.57	CDM-T MW 230 / SAP-T 250---	277 W	E40	WHITE

Accessories



- 1187 protective grid



- 1185 recess frame



- 1188 glass

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated