


Download
DXF 2D
- 1115qrk.dxf
Montaggi
- quark.pdf
- quarkem.dxf
- quarkcla.dxf

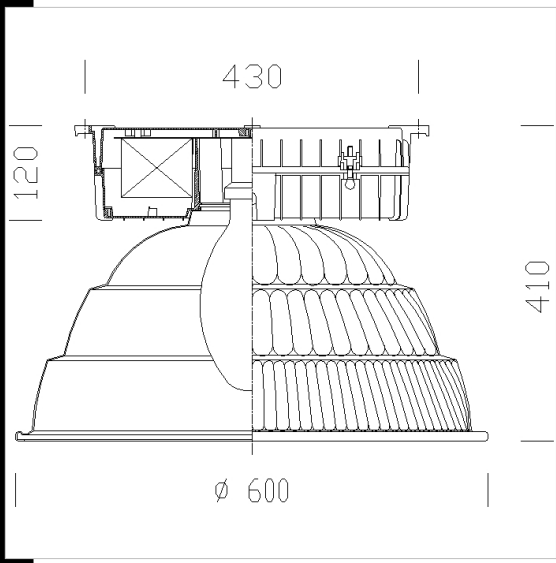

1115 Quark - wide beam

Housing: In die-cast aluminium with wide cooling fins.
 Reflector: In the wide beam version, in pressed prismatic 99.85 anodized aluminium, 6/8 μ thick, polished, for high luminous efficiency.
 Diffuser: Tempered glass, 5 mm thick, thermal shock and impact resistant
 Painting: With polyester powder, black colour, upon chromate treatment, resistant to corrosive and saline environments.
 Lampholder: In ceramics, with silver-plated contacts. Socket E40.
 Electric gear: 230-240V/50Hz power supply. Silicone flexible wire terminated with quick-connect clamps in admiralty brass, with fiberglass braid, 1.0 sqmm cross section. 2P+T terminal block with maximum allowed lead cross section of 4 sqmm.
 Standard supply: The reflector remains hooked to the fixture by means of suspension chains. Removable gear tray for easy maintenance.
 Equipment: Gasket in environment-friendly silicone rubber material. Eyebolt with steel threaded stem.
 Cable gland in f.g. nylon, Ø 1/2 gas thread (cable min Ø 9, max Ø 12).
 Mounting: Ceiling, wall mounting, suspension or installation on art. 6000 industrial track with acc 6037
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ). They have obtained the ENEC European Certificate of Conformity. Moreover, these products can be installed on normally inflammable surfaces.
 Additional gear: With electronic switching device (CLA) for auxiliary lamp or with emergency kit.
 Emergency version: In the event of a blackout, FLC18L lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

Code	Gear	Kg	Watt	Base	Lamps	Colour
321643-07	CNRL-E	12,30	SAP-E 250	E40	31200lm-2000K-Ra 4	GRAPHITE
321643-79	CNR-L	12,30	SAP-E 250	E40	31200lm-2000K-Ra 4	GRAPHITE
321646-79	CNR-L	12,72	JM-E 400	E40	32500lm-4500k-Ra 2b	BLACK
321646-00	CNR-L	12,72	JM-E 400	E40	32500lm-4500k-Ra 2b	BLACK
321643-00	CNR-L	12,30	SAP-E 250	E40	31200lm-2000K-Ra 4	GRAPHITE
321645-07	CNRL-E	13,70	SAP-E 400	E40	54000lm-2000K-Ra 4	GRAPHITE
321645-0064	CNR-L	13,70	SAP-E 400	E40	54000lm-2000K-Ra 4	GRAPHITE
321643-0064	CNR-L	12,30	SAP-E 250	E40	31200lm-2000K-Ra 4	GRAPHITE
321642-0064	CNR-L	12,30	JM-E 250	E40	18000lm-4500k-Ra 2b	GRAPHITE
321645-79	CNR-L	13,70	SAP-E 400	E40	54000lm-2000K-Ra 4	GRAPHITE
321646-07	CNRL-E	12,72	JM-E 400	E40	32500lm-4500k-Ra 2b	GRAPHITE
321645-00	CNR-L	13,70	SAP-E 400	E40	54000lm-2000K-Ra 4	GRAPHITE
321642-00	CNR-L	11,28	JM-E 250	E40	18000lm-4500k-Ra 2b	BLACK
321646-0064	CNR-L	13,70	JM-E 400	E40	32500lm-4500k-Ra 2b	GRAPHITE
321642-07	CNRL-E	11,62	JM-E 250	E40	18000lm-4500k-Ra 2b	BLACK
321642-79	CNR	11,40	JM-E 250	E40	18000lm-4500k-Ra 2b	GRAPHITE

