


**Download**  
DXF 2D  
- 1117qrk.dxf  
Montaggi  
- quark.pdf  
- quarkem.dxf  
- quarkcla.dxf

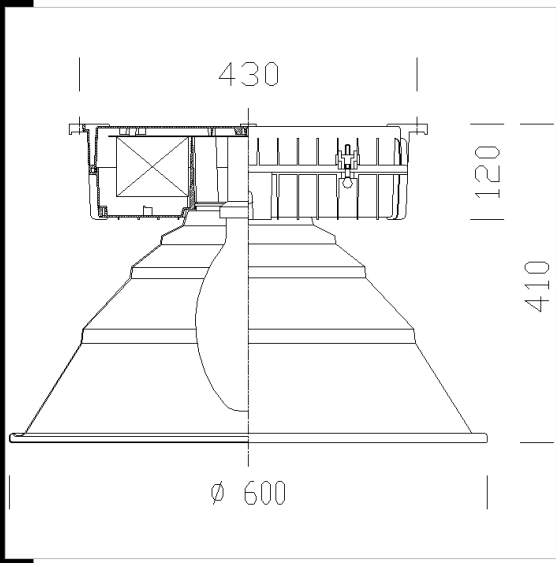

**1117 Quark -narrow beam**

Housing: In die-cast aluminium with wide cooling fins.  
 Reflector: In pressed prismatic 99.85 anodized aluminium, 6/8 µ thick, polished, for high light efficiency.  
 Diffuser: Tempered protective glass, 5 mm thick, thermal shock and impact resistant  
 Painting: With epoxy-polyester powder, black colour, upon chromate treatment, resistant to corrosive and salty environments.  
 Lampholder: In ceramics, with silver-plated contacts. Socket E40.  
 Electric gear: 230-240V/50Hz power supply. Silicone flexible wire terminated with quick-connect clamps in admiralty brass, with fiberglass braid, 1.0 sqmm cross section. 2P+T terminal block with maximum allowed lead cross section of 4 sqmm.  
 Supply: The reflector remains hooked to the fixture by means of suspension chains. Removable gear tray for easy maintenance.  
 Equipment: Gasket in environment-friendly silicone rubber material. Eyebolt with steel threaded stem.  
 Cable gland in f.g. nylon, Ø 1/2 gas thread (cable min Ø 9, max Ø 12).  
 Mounting: Ceiling, wall mounting, suspension or installation on art. 6000 industrial track with acc 6037  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ). They have obtained the ENEC European Certificate of Conformity. Moreover, these products can be installed on normally inflammable surfaces.  
 Additional gear: With electronic switching device (CLA) for auxiliary lamp or with emergency kit.  
 Emergency version: In the event of a blackout, FLC18L lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

Code	Gear	Kg	Watt	Base	Lamps	Colour
321842-0064	CNR-L	11,90	JM-E 250	E40	18000lm-4500k-Ra 2b	GRAPHITE
321846-79	CNR-L	12,12	JM-E 400	E40	32500lm-4500k-Ra 2b	GRAPHITE
321842-00	CNR-L	10,86	JM-E 250	E40	18000lm-4500k-Ra 2b	GRAPHITE
321846-00	CNR-L	12,12	JM-E 400	E40	32500lm-4500k-Ra 2b	GRAPHITE
321846-0064	CNR-L	12,00	JM-E 400	E40	32500lm-4500k-Ra 2b	GRAPHITE
321842-79	CNR-L	10,86	JM-E 250	E40	18000lm-4500k-Ra 2b	BLACK
321846-07	CNRL-E	12,12	JM-E 400	E40	32500lm-4500k-Ra 2b	GRAPHITE
321842-07	CNRL-E	10,86	JM-E 250	E40	18000lm-4500k-Ra 2b	GRAPHITE

**Accessories**

