




3121 Ghost - metallic internal diffuser

Housing: In die-cast aluminium, with wide cooling fins.
 Diffuser: All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency.
 Coating: Multistage process. Stage 1: gris epoxy cationic electrocoating, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: sandblasted silver acrylic finishing.
 Lampholder: In ceramics, with silver-plated or polycarbonate contacts.
 Electric gear: 230V/50Hz power supply. Silicone flexible wire terminated with quick-connect admiralty brass clamps, with fibreglass braid, 1.5 sqmm cross-section. 2P+T terminal block with maximum allowed lead cross section of 2,5 sqmm.
 Equipment: Suspension hook. Rubber cable gland Ø ½" gas thread (cable min Ø 9, max Ø12).
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, it has been granted the ENEC European Certificate of Conformity. IP43IK08 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.

Download
 DXF 2D
 - 3120_1_2.dxf
 Montaggi
 - ghostcat.dxf
 - 3120_1.dxf
 - ghostcan.dxf
 - ap_diff.dxf
 - 3110-11-12-13-14-20-21-22-23-24_ghost.pdf
 - ghostcat.dxf

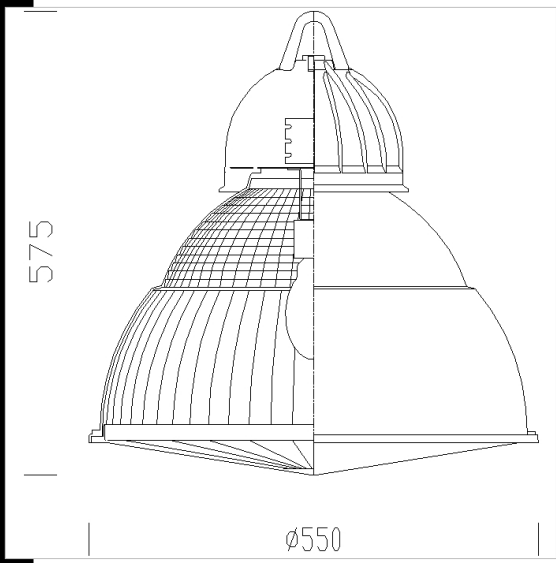

Code	Gear	Kg	Watt	Base	Lamps	Colour
323031-00	CELL	0,00	FLC 1x70T/E	GX24q-6	5200lm-4000k-Ra 1b	SANDBLASTED SILVER
323037-00	CNR-L	6,74	JM-E 150	E27	13300lm-3200K-Ra 1b	SANDBLASTED SILVER
323035-00	CNR-L	6,74	CDO-TT 150	E40	13500lm-2800K-Ra 1b	SANDBLASTED SILVER

Accessories

 - 2511 one-lamp powered	 - 2512 wire	 - 2518 simple suspension	 - 2507 simple suspension
 - 2509 powered suspension	 - 2510 one-lamp suspension	 - 2508 powered suspension	