


3112 Ghost - painted diffuser


Housing: In die-cast aluminium, with wide cooling fins.
Diffuser: All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency.
Coating: Multistage process. Stage 1: gris epoxy cationic electrocoating, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: metallised silver acrylic finishing.
Lampholder: In ceramics, with silver-plated or polycarbonate contacts.
Electric gear: 230V/50Hz power supply. Silicone flexible wire terminated with quick-connect admiralty brass clamps, with fibreglass braid, 1.5 sqmm cross-section. 2P+T terminal block with maximum allowed lead cross section of 2,5 sqmm.
Standard supply: Removable gear tray.
Equipment: Suspension hook. Rubber cable gland Ø ½" gas thread (cable min Ø 9, max Ø12).
Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, it has been granted the ENEC European Certificate of Conformity. IP43IK08 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.

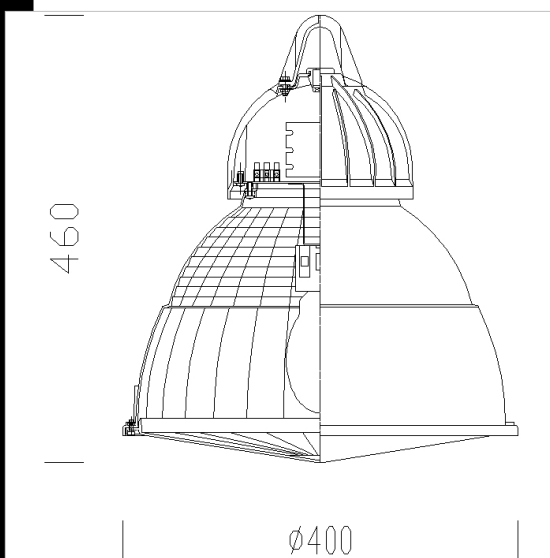

Download
 DXF 2D
 - d3110.dxf
 3DS
 - 3111_ghost.3ds
 3DM
 - 3111_ghost.3dm
 Montaggi
 - 3110-11-12-13-14-20-21-22-23-24_ghost.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
323124-00	CNR-L	4.20	CDM-T 70-6600lm-3000K-Ra 1b	82 W	G12	GREY9007
323121-00	CELL	4.20	FLC 1x42T/E-3200lm-4000K-Ra 1b	44 W	Gx24q-4	GREY9007

Accessories

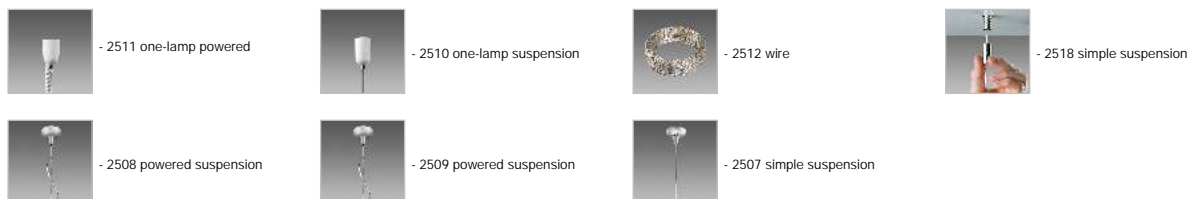

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated