




Download

- DXF 2D
- d3110.dxf
- 3DS
- 3111_ghost.3ds
- 3DM
- 3111_ghost.3dm
- Montaggi
- 3110-11-12-13-14-20-21-22-23-24_ghost.pdf



3112 Ghost - painted diffuser

Housing: In die-cast aluminium, with wide cooling fins.
 Diffuser: All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, vandal-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency.
 Coating: Multistage process. Stage 1: gris epoxy cationic electrocoating, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: metallised silver acrylic finishing.
 Lampholder: In ceramics, with silver-plated or polycarbonate contacts.
 Electric gear: 230V/50Hz power supply. Silicone flexible wire terminated with quick-connect admiralty brass clamps, with fibreglass braid, 1.5 sqmm cross-section. 2P+T terminal block with maximum allowed lead cross section of 2,5 sqmm.
 Standard supply: Removable gear tray.
 Equipment: Suspension hook. Rubber cable gland Ø ½" gas thread (cable min Ø 9, max Ø12).
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, it has been granted the ENEC European Certificate of Conformity. IP43IK08 degree of protection according to EN 60529 standards.
 This product can be installed on normally inflammable surfaces.

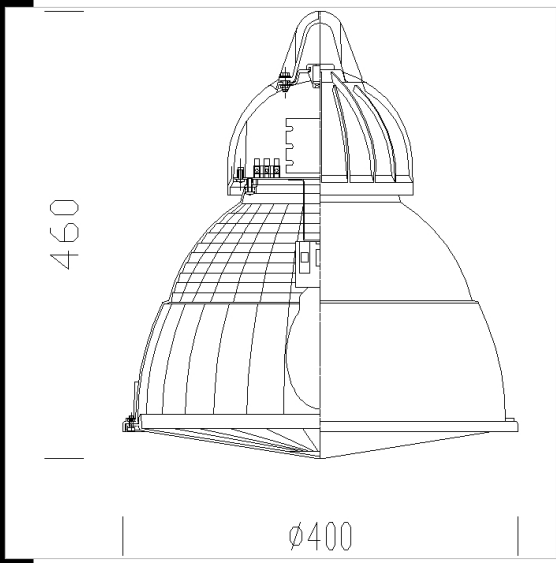

Code	Gear	Kg	Watt	Base	Lamps	Colour
323121-00	CELL	4,20	FLC 1x42T/E	Gx24q-4	3200lm-4000K-Ra 1b	SANDBLASTED SILVER
323124-00	CNR-L	4,20	CDM-T 70	G12	6600lm-3000K-Ra 1b	SANDBLASTED SILVER
323123-00	S	0,00	FLC 23EL/MAX100	E27	--	MET. SILVER
323124-01	CNR-L	4,80	CDM-T 70	G12	6600lm-3000K-Ra 1b	SANDBLASTED SILVER

Accessories

