



Download

DXF 2D
- 3120_1_2.dxf
3DS
- 3121_ghost.3ds
3DM
- 3121_ghost.3dm
Montaggi
- 3110-11-12-13-14-20-21-22-23-24_ghost.pdf



3122 Ghost - painted diffuser

Housing: In die-cast aluminium, with wide cooling fins.

Diffuser: All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, vandal-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency.

Coating: Multistage process. Stage 1: gris epoxy cationic electrocoating, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: sandblasted silver acrylic finishing.


Lampholder: In ceramics, with silver-plated or polycarbonate contacts.

Electric gear: 230V/50Hz power supply. Silicone flexible wire terminated with quick-connect admiralty brass clamps, with fibreglass braid, 1.5 sqmm cross-section. 2P+T terminal block with maximum allowed lead cross section of 2,5 sqmm.

Equipment: Suspension hook. Rubber cable gland Ø ½" gas thread (cable min Ø 9, max Ø12).

Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, it has been granted the ENEC European Certificate of Conformity. IP43IK08 degree of protection according to EN 60529 standards.

This product can be installed on normally inflammable surfaces.

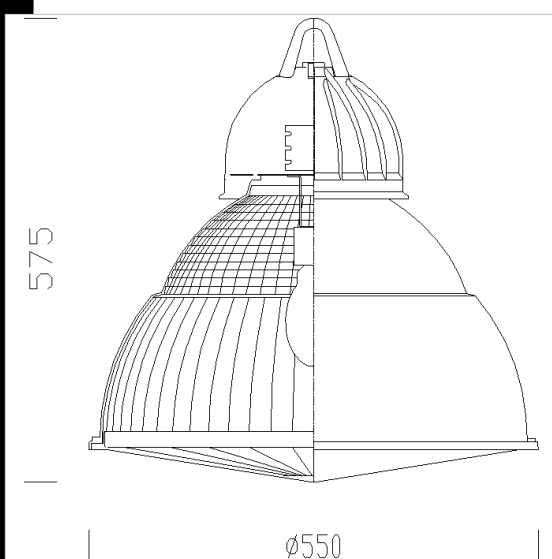

Code	Gear	Kg	Watt	Base	Lamps	Colour
323135-00	CNR-L	6,70	CDO-TT 150	E40	13500lm-2800K-Ra 1b	SANDBLASTED SILVER
323137-00	CNR-L	6,28	JM-E 150	E27	13300lm-3200K-Ra 1b	SANDBLASTED SILVER
323133-00	CELL	0,00	FLC 1x70T/E	GX24q-6	5200lm-4000k-Ra 1b	
323134-00	CELL	0,00	FLC 1x42T/E	Gx24q-4	3200lm-4000K-Ra 1b	

Accessories



- 2511 one-lamp powered



- 2512 wire



- 2518 simple suspension



- 2507 simple suspension



- 2509 powered suspension



- 2510 one-lamp suspension



- 2508 powered suspension