




### 3123 Ghost - direct and indirect light

**Housing:** In die-cast aluminium, with wide cooling fins.  
**Diffuser:** All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, vandal-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency.  
**Coating:** Multistage process. Stage 1: gris epoxy cationic electrocoating, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: sandblasted silver acrylic finishing.  
**Lampholder:** In ceramics, with silver-plated or polycarbonate contacts.  
**Electric gear:** 230V/50Hz power supply. Silicone flexible wire terminated with quick-connect admiralty brass clamps, with fibreglass braid, 1.5 sqmm cross-section. 2P+T terminal block with maximum allowed lead cross section of 2,5 sqmm.  
**Equipment:** Suspension hook. Rubber cable gland Ø ½" gas thread (cable min Ø 9, max Ø12).  
**Regulations:** Produced according to applicable EN60598-1 CEI 34 - 21 standards, it has been granted the ENEC European Certificate of Conformity. IP43IK08 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.


#### Download

- DXF 2D  
- 3120\_1\_2.dxf
- 3DS  
- 3121\_ghost.3ds
- 3DM  
- 3121\_ghost.3dm
- Montaggi  
- 3110-11-12-13-14-20-21-22-23-24\_ghost.pdf

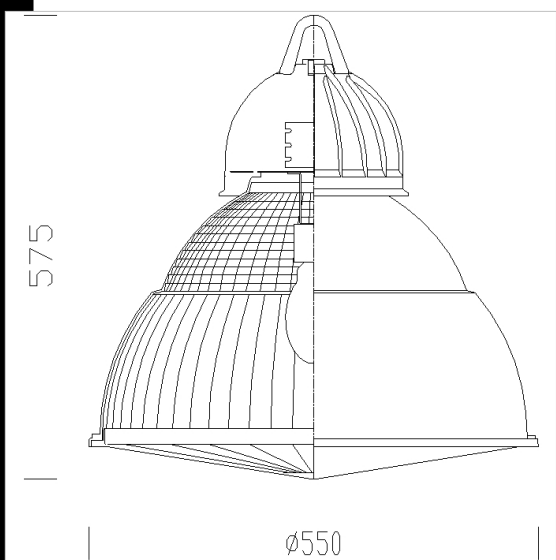

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
323147-00	CNR-L	6.28	JM-E 150-13300lm-3200K-Ra 1b	157 W	E27	GREY9007
323145-00	CNR-L	6.28	CDO-TT 150-13500lm-2800K-Ra 1b	157 W	E40	GREY9007

#### Accessories

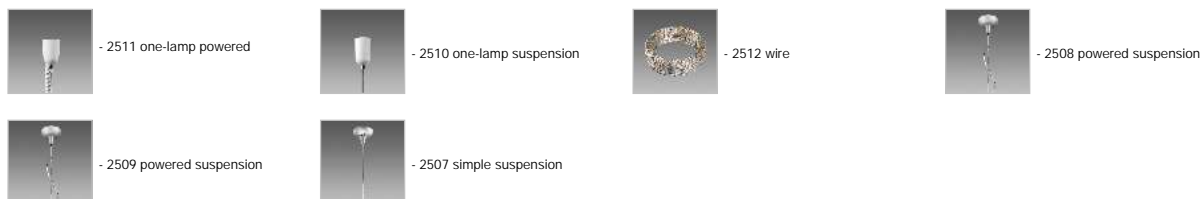

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated