

| | | |
|------|------|------|
| IK08 | S | CNRL |
| CELL | | |
| | IP43 | V2 |
| | UV | |
| | A+B= | |
| | | |


Download

- DXF 2D
- d3110.dxf
- 3DS
- 3111_ghost.3ds
- 3DM
- 3111_ghost.3dm
- Montaggi
- 3110-11-12-13-14-20-21-22-23-24_ghost.pdf



3113 Ghost - direct and indirect light

Housing: In die-cast aluminium, with wide cooling fins.
Diffuser: All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, vandal-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency.
Coating: Multistage process. Stage 1: gris epoxy cationic electrocoating, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: sandblasted silver acrylic finishing.
Lampholder: In ceramics, with silver-plated or polycarbonate contacts.
Electric gear: 230V/50Hz power supply. Silicone flexible wire terminated with quick-connect admiralty brass clamps, with fibreglass braid, 1.5 sqmm cross-section. 2P+T terminal block with maximum allowed lead cross section of 2,5 sqmm.
Equipment: Suspension hook. Rubber cable gland Ø ½" gas thread (cable min Ø 9, max Ø12).
Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, it has been granted the ENEC European Certificate of Conformity. IP43IK08 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.

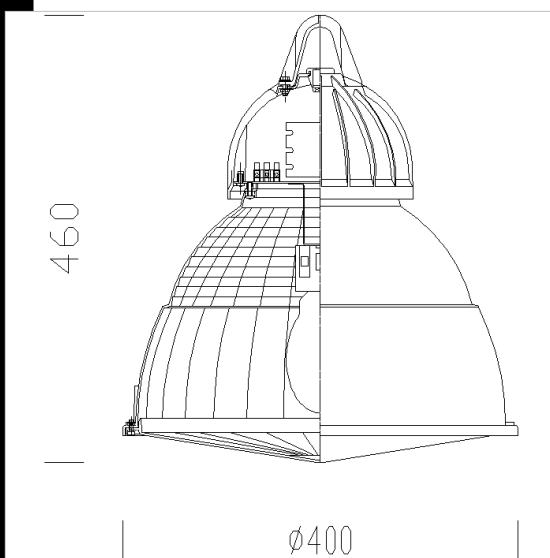

| Code | Gear | Kg | Watt | Base | Lamps | Colour |
|-----------|-------|------|-------------|---------|--------------------|--------------------|
| 323154-00 | CNR-L | 4,09 | CDM-T 70 | G12 | 6600lm-3000K-Ra 1b | SANDBLASTED SILVER |
| 323153-00 | CNR-L | 0,00 | FLC 1x23EL | E27 | 1550lm-2700K-Ra 1b | MET. SILVER |
| 323151-00 | CELL | 3,01 | FLC 1x42T/E | Gx24q-4 | 3200lm-4000K-Ra 1b | SANDBLASTED SILVER |

Accessories

| | | | | | | | |
|--|----------------------------|--|---------------------------|--|--------------------------|--|---------------------------|
| | - 2511 one-lamp powered | | - 2512 wire | | - 2507 simple suspension | | - 2509 powered suspension |
| | - 2510 one-lamp suspension | | - 2508 powered suspension | | | | |