

**IP54**

**Download**

DXF 2D  
- 3114.dxf


**Montaggi**

- 3120\_bracciocurvo\_doppio.dxf  
- 3120\_ananas\_singolo.dxf  
- 3120\_palo\_doppio.dxf  
- 3120\_palo\_singolo.dxf



**3114 Ghost - direct and indirect light**

Housing: In die-cast aluminium, with wide cooling fins.  
 Diffuser: All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, vandal-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency. With temperad glass  
 Coating: Multistage process. Stage 1: gris epoxy cationic electrocoating, applied, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: sandblasted silver acrylic finishing.  
 Lampholder: In ceramics, with silver-plated or polycarbonate contacts.  
 Electric gear: 230V/50Hz power supply. Silicone flexible wire terminated with quick-connect admiralty brass clamps, with fibreglass braid, 1.5 sqmm cross-section. 2P+T terminal block with maximum allowed lead cross section of 2,5 sqmm.  
 Equipment: Suspension hook. Rubber cable gland Ø ½" gas thread (cable min Ø 9, max Ø12).  
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, it has been granted the ENEC European Certificate of Conformity. IP54IK08 degree of protection according to EN 60529 standards.  
 This product can be installed on normally inflammable surfaces.

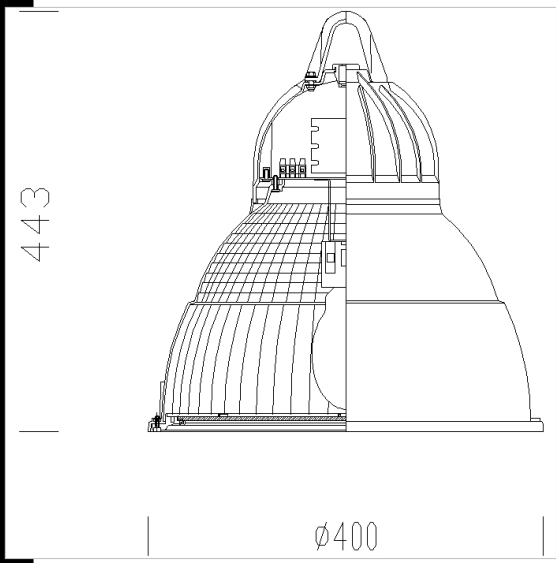

Code	Gear	Kg	Watt	Base	Lamps	Colour
323164-00	CNR-L	4,20	JM-E 70	E27	5300lm-4000k-Ra 1b	SANDBLASTED SILVER
323161-00	CELL	4,09	FLC 1x42T/E	Gx24q-4	3200lm-4000K-Ra 1b	SANDBLASTED SILVER

**Accessories**

