


IK08		
CNRL	CELL	
		CE
IP43	V2	
ZONA 1	850°	



### 3124 Ghost - direct and indirect light

Housing: In die-cast aluminium, with wide cooling fins.  
 Diffuser: All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, vandal-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency. With temperad glass  
 Coating: Multistage process. Stage 1: gris epoxy cationic electrocoating, applied, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: sandblasted silver acrylic finishing.  
 Lampholder: In ceramics, with silver-plated or polycarbonate contacts.  
 Electric gear: 230V/50Hz power supply. Silicone flexible wire terminated with quick-connect admiralty brass clamps, with fibreglass braid, 1.5 sqmm cross-section. 2P+T terminal block with maximum allowed lead cross section of 2,5 sqmm.  
 Equipment: Suspension hook. Rubber cable gland Ø ½" gas thread (cable min Ø 9, max Ø12).  
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, it has been granted the ENEC European Certificate of Conformity. IP54IK08 degree of protection according to EN 60529 standards.  
 This product can be installed on normally inflammable surfaces.

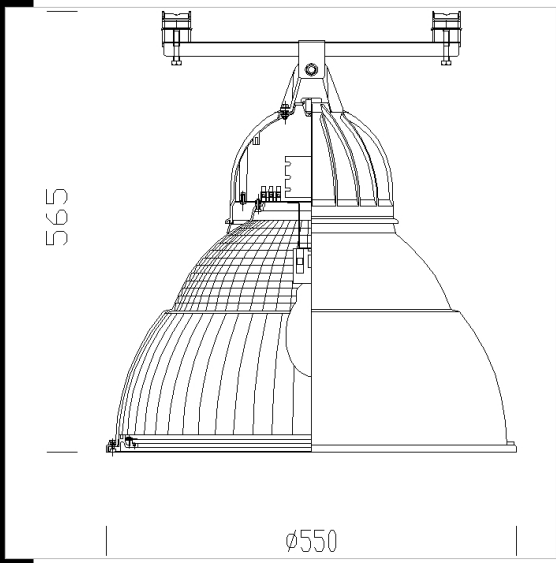

**Download**  
 DXF 2D  
 - 3124-5.dxf  
 Montaggi  
 - 3120\_braccio\_su-giu.dxf  
 - 3120\_ananas\_doppio.dxf  
 - 3120\_palo\_doppio.dxf

Code	Gear	Kg	Watt	Base	Lamps	Colour
323177-00	CELL	8,20	FLC 70T/E	Gx24q-6	5200lm-4000K-Ra 1b	SANDBLASTED SILVER
323175-00	CNR-L	6,70	CDO-ET 150	E40	13500lm-2800K-Ra 1b	SANDBLASTED SILVER

#### Accessories

	- 214 Attacco standardo piccolo		- 211 connector Sector		- 212 Anello giunzione		- 213 Attacco standardo lungo
	- 301 Oliva arm		- 1464 Corona		- 1465 flange ø120		- 1365 flange ø100
	- 1364 Corona ø100		- 160 suspension unit		- 304 threaded connection		- 1373 bent arm
	- 1473 bent arm		- 2508 powered suspension				