



1669 Mini Brera

Housing: in die-cast aluminium.
 Cover: in die-cast aluminium with hinged opening in a single piece. Aluminium latches and safety device against accidental opening.
 Diffuser: tempered glass, 5 mm thick, resistant to impact and thermal shock (UNI EN 12150-1: 2001 tests).
 Coating: graphite grey housing and polyester powder silver coating, resistant to corrosive and saline environments.
 Electric gear: 230V/50Hz power supply. Flexible wire terminated with quick connect admiralty brass clamps; silicone double insulation; cross section: 1.0 sq mm. 2P terminal block (maximum allowed lead cross section 2.5 sq mm).
 Standard supply: Electric gear on a removable tray with quick connectors for line and lamp holder connection. With anti-condensate filter. Dimmer switch option available.
 Equipment: when the cover is open, it stays hooked on by a special device against accidental opening for easy maintenance. Rotating socket with goniometric scale to adjust the housing and the standard knife switch.
 Reflector: NON-POLLUTING LOUVRE.
 In pressed 99.85 aluminium, anodically oxidized and polished. The lamp focus can be regulated.
 Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.
 Wind surface: 800cm².

Download
 DXF 2D
 - 1669.dxf
 3DS
 - disano_1669_mini_brera.3ds
 3DM
 - disano_1669_mini_brera.3dm
 Montaggi
 - 1669.pdf
 - 1669 bipower.pdf

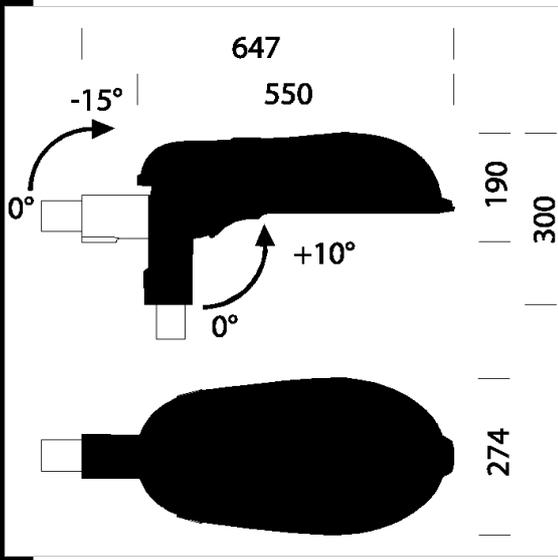

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
324353-00	CNR-L	6,83	CDO-TT 150-13500lm-2800K-Ra 1b	166 W	E40	GREY/GRAFITE
324350-00	CNR	5,73	SAP-T 70---	84 W	E27	GREY/GRAFITE
324352-00	CNR	6,65	SAP-T 150---	166 W	E40	GREY/GRAFITE
324351-00	CNR	6,11	SAP-T 100---	114 W	E40	GREY/GRAFITE

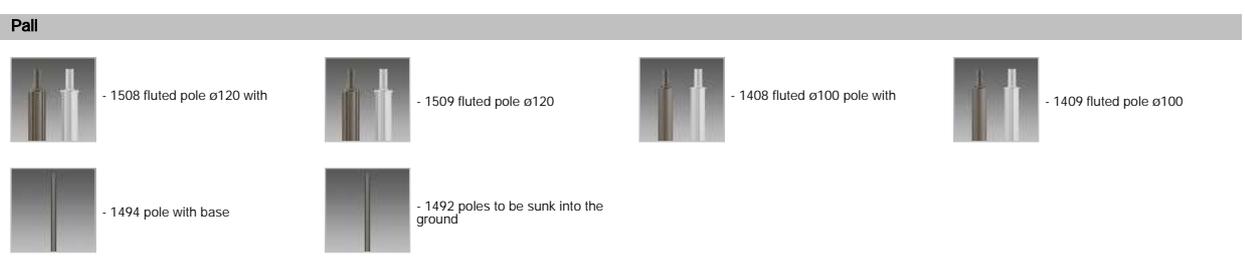

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated