




### 3130 Tex narrow beam


Housing: Die-cast aluminium with wide cooling fins.  
 Reflector: In aluminium with protective glass.  
 Coating: With graphite grey or frosted silver polyester powder, corrosion resistant (it passes the UNI ISO 9227 1000 hr test).  
 Lampholder: Ceramic with silver-plated or polycarbonate contacts.  
 Electric gear: 230V/50Hz power supply with heat protection. Flexible wire terminated with quick-connect admiralty brass clamps, silicone insulation with fibreglass braid, cross-section: 1 sqmm. 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).  
 Equipment: Suspension hook. Rubber cable gland, Ø ½" gas thread (min. cable Ø 9, max Ø12).  
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

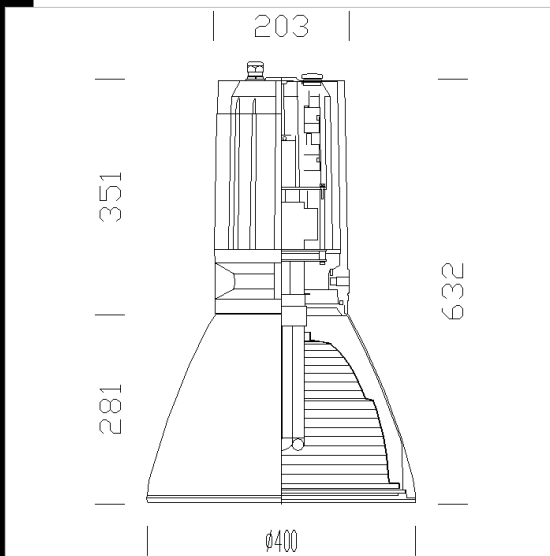

- Download**
- DXF 2D
    - 3130\_31\_32.dxf
  - 3DS
    - disano\_3130\_tex.3ds
  - 3DM
    - disano\_3130\_tex.3dm
  - Montaggi
    - 313x\_314x\_315x\_tex.pdf
    - 3130\_31\_32\_33.dxf
    - 3130\_31\_32\_33\_orientamento.dxf
    - 3130\_31\_32\_33\_com1.dxf
    - tex.pdf
    - 3130\_31\_32\_33\_com2.dxf
    - 3130\_31\_32\_33\_sospensione.dxf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
326023-00	CNR-L	12.89	SAP-T 250-33000lm-2000 K-Ra 4	277 W	E40	GREY/GRAFITE
326021-00	CNR-L	12.89	CDM-T MW 360---	277 W	E40	GREY/GRAFITE
326022-00	CNR-L	11.87	SAP-T 150-17200lm-2000K-Ra 4	157 W	E40	GREY/GRAFITE
326020-00	CNR-L	11.87	CDM-T 150-13000lm-4200k-Ra 2a	157 W	G12	GREY/GRAFITE

#### Accessories

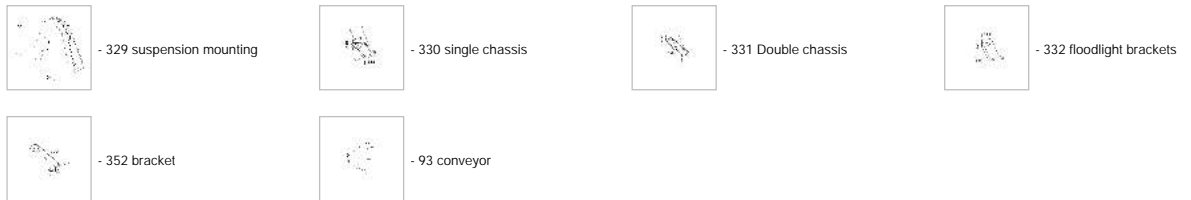

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated