




### 3131 Tex medium beam




Housing: Die-cast aluminium with wide cooling fins.  
 Reflector: In aluminium with protective glass.  
 Coating: With graphite grey or frosted silver polyester powder, corrosion resistant (it passes the UNI ISO 9227 1000 hr test).  
 Lampholder: Ceramic with silver-plated or polycarbonate contacts.  
 Electric gear: 230V/50Hz power supply with heat protection. Flexible wire terminated with quick-connect admiralty brass clamps, silicone insulation with fibreglass braid, cross-section: 1 sqmm. 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).  
 Equipment: Rubber cable gland, Ø ½" gas thread (min. cable Ø 9, max Ø12).  
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

#### Download

- DXF 2D
- 3130\_31\_32.dxf
- 3DS
- disano\_3131\_tex.3ds
- 3DM
- disano\_3131\_tex.3dm
- Montaggi
- 3130\_31\_32\_33.dxf
- 3130\_31\_32\_33\_orientamento.dxf
- 3130\_31\_32\_33\_com1.dxf
- tex.pdf
- 3130\_31\_32\_33\_com2.dxf
- 3130\_31\_32\_33\_sospensione.dxf

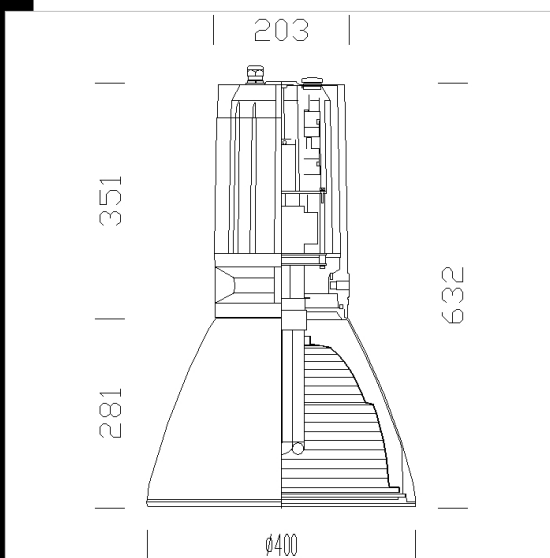

#### Accessories

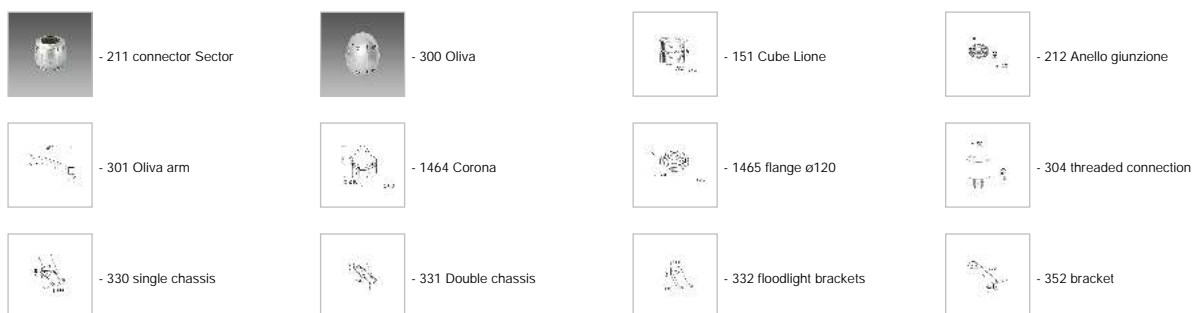

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated