


3132 Tex wide beam

Housing: Die-cast aluminium with wide cooling fins.
 Reflector: In aluminium with protective glass.
 Coating: With graphite grey or frosted silver polyester powder, corrosion resistant (it passes the UNI ISO 9227 1000 hr test).
 Lampholder: Ceramic with silver-plated or polycarbonate contacts.
 Electric gear: 230V/50Hz power supply with heat protection. Flexible wire terminated with quick-connect admiralty brass clamps, silicone insulation with fibreglass braid, cross-section: 1 sqmm. 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).
 Equipment: Suspension hook. Rubber cable gland, Ø ½" gas thread (min. cable Ø 9, max Ø12).
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

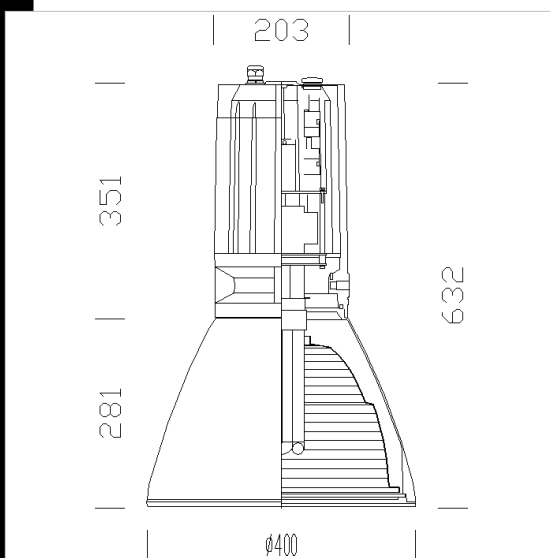


Download

- DXF 2D
 - 3130_31_32.dxf
- Montaggi
 - 313x_314x_315x_tex.pdf
 - 3130_31_32_33.dxf
 - 3130_31_32_33_orientamento.dxf
 - 3130_31_32_33_com1.dxf
 - tex.pdf
 - 3130_31_32_33_com2.dxf
 - 3130_31_32_33_sospensione.dxf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
326041-00	CNR-L	12.89	JM-T 250-19000lm-4000K-Ra 2b	277 W	E40	GREY/GRAFITE
326044-00	CELL	9.89	FLC 1x85P/E-6000lm-4000k-Ra 1b	93 W	2G8	GREY/GRAFITE
326040-0064	CNR-L	0.00	CDM-T 150-12700lm-4200k-Ra 2a	0 W	G12	SILVER/GRAPHITE
326041-0064	CNR-L	0.00	JM-T 250-19000lm-4000K-Ra 2b	0 W	E40	SILVER/GRAPHITE
326042-0064	CNR-L	0.00	SAP-T 150-17200lm-2000K-Ra 4	0 W	E40	SILVER/GRAPHITE
326043-0064	CNR-L	0.00	SAP-T 250-33000lm-2000 K-Ra 4	0 W	E40	SILVER/GRAPHITE
326044-0064	CELL	0.00	FLC 1x85P/E-6000lm-4000k-Ra 1b	0 W	2G8	SILVER/GRAPHITE
326042-00	CNR-L	12.15	SAP-T 150-17200lm-2000K-Ra 4	157 W	E40	GREY/GRAFITE
326043-00	CNR-L	12.89	SAP-T 250-33000lm-2000 K-Ra 4	277 W	E40	GREY/GRAFITE
326040-00	CNR-L	11.87	CDM-T 150-12700lm-4200k-Ra 2a	157 W	G12	GREY/GRAFITE

Accessories

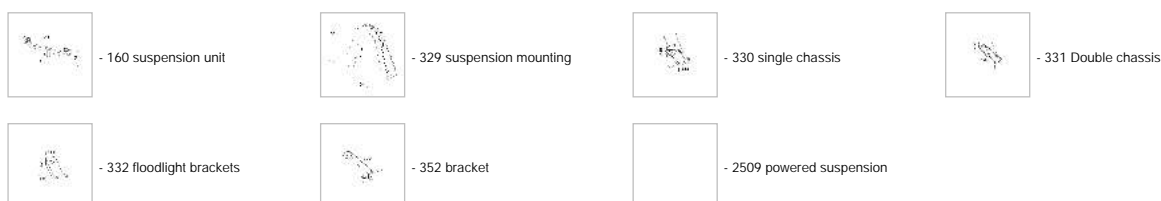

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated