


381 Short arm

Aluminium base with steel tube.
To be used with access. 302 for wall-mounted installation.


Download

- DXF 2D
- 381.dxf
- 3DS
- disano_381.3ds
- 3DM
- disano_381.3dm



Ø60

200

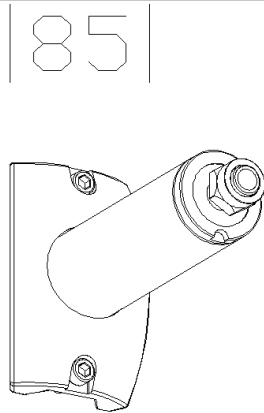

85

Ø60

200

Code	Kg	WTot	Colour
326503-00	1.70	0 W	GREY9007

Products



- 3165 Iride - direct/ indirect light



- 3160 Iride - direct light



- 3164 Iride - direct scattered



- 3162 Iride - direct light



- 3167 Iride - LED direct light



- 3166 Iride dir/ind LED RGB

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated