


### 3160 Iride - direct light

Housing: die cast aluminium.  
 Upper frame in direct light version: die cast aluminium prepared for installation using accessories, hook or metal threaded tubes.  
 Lower diffuser: tempered glass, thickness 5 mm, withstands thermal shocks and impacts (UNI EN 12150-1/2001 tests).  
 Direct light reflector: 99.85 aluminium, anodically oxidised and polished.  
 Painting: In several stages. epoxy cationic electrocoating, resistant to corrosive and saline environments, UV stabilising priming; lastly a rough finish with frosted silver.  
 Wiring: 230/50 Hz power supply. Double insulation, flexible wire, 1 sq.mm. cross-section.  
 Disconnecting switch supplied as a standard feature in the road versions to interrupt the line in the case of maintenance.  
 Equipment: the frame remains attached to the housing by a hinged opening during maintenance operations in the road versions. Wiring positioned on a removable plate with quick connectors to connect the line and the lampholder socket.  
 With double insulation  
 Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

**Download**

- DXF 2D  
- 3160.dxf
- 3DS  
- disano\_3160\_iride.3ds
- 3DM  
- disano\_3160\_iride.3dm
- Montaggi  
- iride.pdf  
- iride.dxf

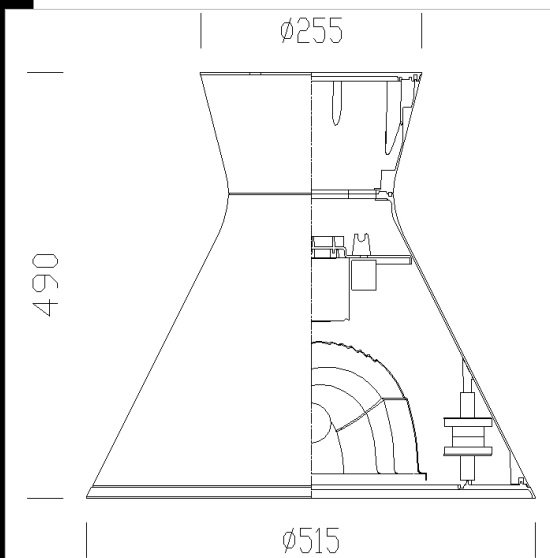

Code	Gear	Kg	Watt	Base	Lamps	Colour
326510-00	CNR-L	12,50	SAP-T 150	E40	17200lm-2000K-Ra 4	SANDBLASTED SILVER
326511-00	CNR-L	12,50	CDO-TT 150	E40	13500lm-2800K-Ra 1b	SANDBLASTED SILVER

**Accessories**

