



Download

DXF 2D
- 3164.dxf

3DS
- disano_3164_iride.3ds

3DM
- disano_3164_iride.3dm

Montaggi
- iride.pdf
- iride.dxf



3164 Iride - direct scattered light

Housing: die cast aluminium.

Upper frame in direct light version: die cast aluminium prepared for installation using accessories, hook or metal threaded tubes.

Lower diffuser: tempered glass, thickness 5 mm, withstands thermal shocks and impacts (UNI EN 12150-1/2001 tests).

Direct light reflector: 99.85 aluminium, anodically oxidised and polished.

Painting: In several stages. epoxy cationic electrocoating, resistant to corrosive and saline environments, UV stabilising priming; lastly a rough finish with frosted silver.


Wiring: 230/50 Hz power supply. Double insulation, flexible wire, 1 sq.mm. cross-section.

Disconnecting switch supplied as a standard feature in the road versions to interrupt the line in the case of maintenance.

Equipment: The frame remains attached to the housing by means of steel safety straps in the vertical lamp version if the lamp has to be changed. Wiring positioned on a removable plate with quick connectors to connect the line and the lampholder socket.

Regulations: products complying with the current EN60598-1-2 standards. Protection level: IP65 IK08, in accordance with EN60529.

With double insulation

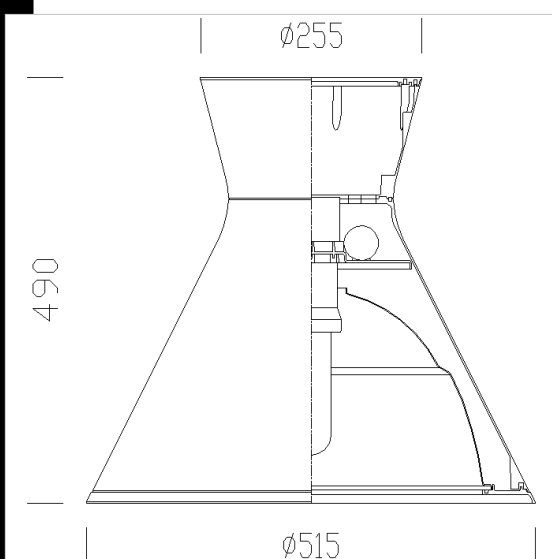

Code	Gear	Kg	Watt	Base	Lamps	Colour
326551-00	CNR-L	12,50	CDO-TT 150	E40	13500lm-2800K-Ra 1b	SANDBLASTED SILVER
326552-00	CELL	9,13	FLC 120P/E	2G8	9000lm-4000k-Ra 1b	SANDBLASTED SILVER

Accessories



- 211 connector Sector



- 300 Oliva



- 302 attacco parete



- 160 suspension unit



- 222 cover



- 329 suspension mounting



- 223 cover



- 2508 powered suspension



- 380 Suspension 3x



- 386 arm



- 450 LED head



- 381 wall mount



- 382 wall mount



- 383 pole connector 1x



- 384 pole connector 2x



- 385 pole connector 1x