




Download

- DXF 2D
- 3165.dxf
- 3DS
- disano_3165_iride.3ds
- 3DM
- disano_3165_iride.3dm
- Montaggi
- iride.pdf
- iride.dxf



3165 Iride - direct/ indirect light

Housing: die cast aluminium.
 Upper frame in indirect light version: die cast aluminium, complete with tempered and milled glass, thickness 10 mm, withstands thermal shocks and impacts (UNI EN 12150-1/2001 tests).
 Lower diffuser: tempered glass, thickness 5 mm, withstands thermal shocks and impacts (UNI EN 12150-1/2001 tests).
 Direct light reflector: 99.85 aluminium, anodically oxidised and polished.
 Indirect light reflector: 99.85 aluminium, anodically oxidised and polished.
 Painting: In several stages. epoxy cationic electrocoating, resistant to corrosive and saline environments, UV stabilising priming; lastly a rough finish with frosted silver
 Wiring: 230/50 Hz power supply. Double insulation, flexible wire, 1 sq.mm. cross-section.
 Equipment: The frame remains attached to the housing by means of steel safety straps in the vertical lamp version if the lamp has to be changed. Wiring positioned on a removable plate with quick connectors to connect the line and the lampholder socket.
 Regulations: products complying with the current EN60598-1-2 standards. Protection level: IP65 IK08, in accordance with EN60529.
 With double insulation

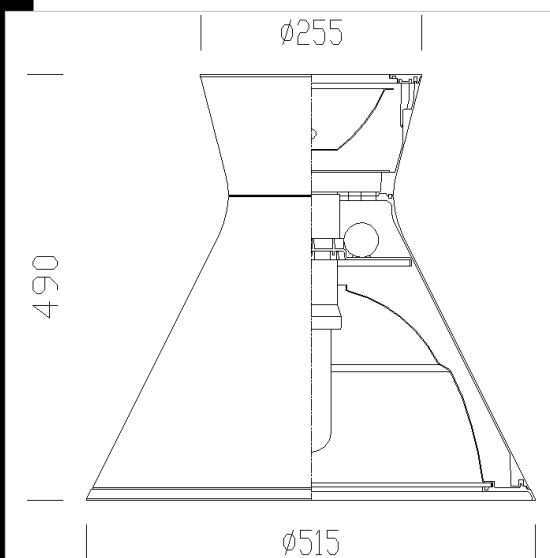

Code	Gear	Kg	Watt	Base	Lamps	Colour
326562-00	CELL	9,85	FLC 120P/E + FLC20EL	2G8	--	SANDBLASTED SILVER
326561-00	CNR-L	11,71	CDO-TT 150 + ALO100	R7s	1600lm-3000K-Ra 100	SANDBLASTED SILVER

Accessories

