



Download

DXF 2D
- 3167.dxf

3DS
- disano_3167_iride.3ds

3DM
- disano_3167_iride.3dm

Montaggi
- iride.pdf



3167 Iride - LED direct light

Housing: die cast aluminium.

Upper frame in indirect light version: die cast aluminium, complete with tempered and milled glass, thickness 10 mm, withstands thermal shocks and impacts (UNI EN 12150-1/2001 tests).

Lower diffuser: tempered glass, thickness 5 mm, withstands thermal shocks and impacts (UNI EN 12150-1/2001 tests).


Painting: In several stages. epoxy cationic electrocoating, resistant to corrosive and saline environments, UV stabilising priming; lastly a rough finish with frosted silver.

Gear: Safety diode to protect against voltage peaks pursuant to EN61547. Dedicated electronic device to protect the LED module.

Regulations: products complying with the current EN60598-1-2 standards. Protection level: IP65 IK08, in accordance with EN60529.


LED white 40W - 4000K - 6690lm - CRI>70, equipped with silicone lenses, 130° x 70°, CRI>70.

Luminous flux maintenance 80%: 80.000h (L80B20).

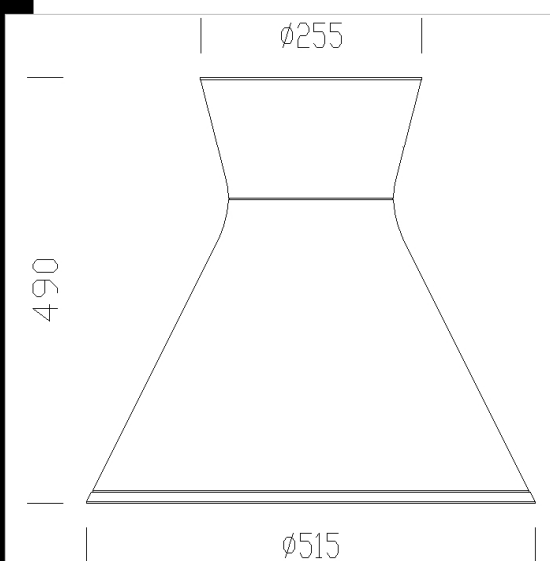

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
326571-00	CLD CELL	10.00	LED-5022lm-4000K-CRI>70	46 W	GREY9007

Accessories

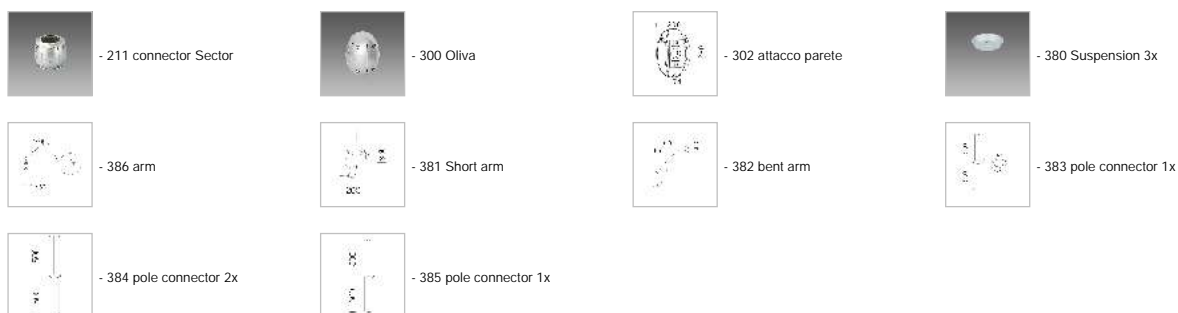

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated