


3175 Montecarlo LED - wide beam - elliptical lenses



Housing/Frame: in die-cast aluminium.  
 Diffuser: tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150-1/2001 tests).  
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
 Standard supply: in case of maintenance, the upper housing remains open through brackets that prevent accidental closing.  
 Standard quick connector for electrical connection.  
 device for automatic temperature control. In the event of an unexpected LED temperature rise caused by particular weather conditions or a LED failure, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation. Standard knife switch.  
 The total return of the equipment is close to 100%. Each LED module is equipped with a lens with high efficiency 130°x70° lenses  
 LED: Latest generation LED technology, Ta-30+40°C life 80%: 80.000h (L80B20).  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

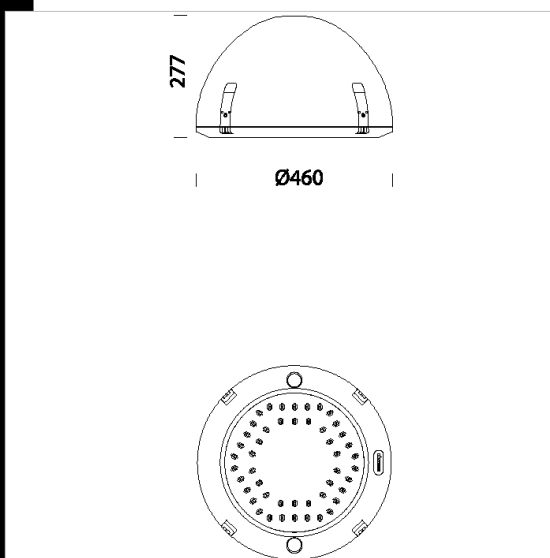

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
326580-00	CLD CELL	7.86	LED-5641lm-4000K-CRI>70	43 W	GREY9007/GRAF.

Accessories

	- 214 Attacco standardo piccolo		- 211 connector Sector		- 300 Oliva		- 212 Anello giunzione
	- 213 Attacco standardo lungo		- 301 Oliva arm		- 302 attacco parete		- 1464 Corona
	- 1465 flange ø120		- 1365 flange ø100		- 1364 Corona ø100		- 160 suspension unit
	- 304 threaded connection		- 1373 bent arm		- 1473 bent arm		- 15 ceiling mount
	- 507 Liberty arm		- 512 Arm		- 1474 bent arm wall mounting		



Download

- DXF 2D  
- 3175.dxf
- 3DS  
- disano\_3175\_montecarlo.3ds
- 3DM  
- disano\_3175\_montecarlo.3dm
- Montaggi  
- montecarlo\_luna installazione.dxf  
- montecarlo\_moni.dxf  
- montecarlo\_liberty installazione.dxf  
- 3178 piastra led-osram.dxf  
- montecarlo.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated