




Download

DXF 2D
- 3172.dxf

3DS
- disano_3172_montecarlo.3ds

3DM
- disano_3172_montecarlo.3dm

Montaggi
- montecarlo_mont.dxf
- montecarlo_luna_installazione.dxf
- montecarlo_mont.dxf
- montecarlo_liberty_installazione.dxf
- 3170_1_2_4_montecarlo.pdf

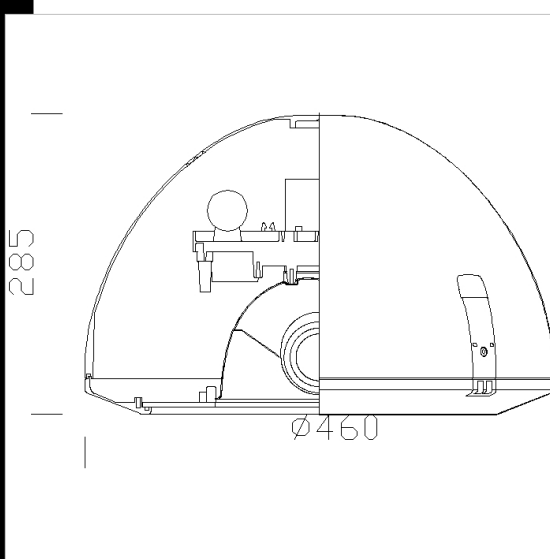

3172 Montecarlo

Housing/Frame: in die-cast aluminium, with aluminium latches.

Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Standard supply: during maintenance the frame stays attached through an internal hinge. Standard knife switch.

Double power version: the products come with remote control installation and power adaptor and can be ordered using sub code -3078. Products fitted with remote control installation only can be ordered using sub code -0078.


Diffuser: tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150-1/2001 tests).

Reflector: NON-POLLUTING LOUVRE in pressed 99.85 aluminium, anodically oxidized and polished.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
326631-00	CNR-L	9.65	SAP-T 150-17200lm-2000K-Ra 4	166 W	E40	GREY9007/GRAF
326633-00	CNR-L	9.65	CDO-TT 150-13500lm-2800K-Ra 1b	166 W	E40	GREY9007/GRAF

Accessories

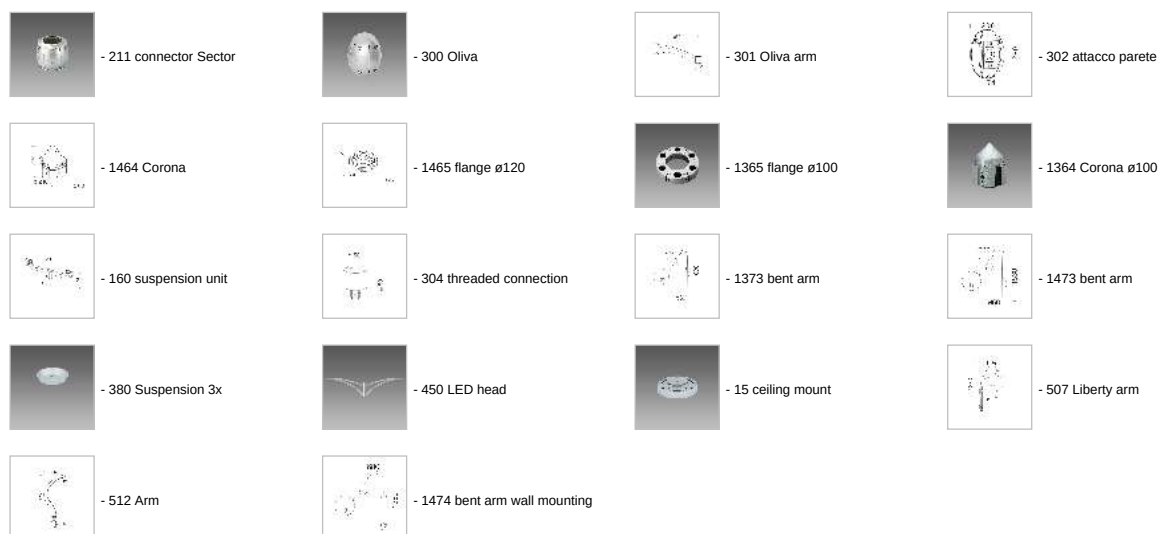

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated