


IK09	CNRL	CELL
	CE	UV
	IP66	EL



3173 Montecarlo

Housing/Frame: in die-cast aluminium with latch.
 Reflector: in pressed 99.85 aluminium, anodically oxidized and polished.
 Diffuser: tempered glass, 5 mm.
 Coating: in several stages. First stage: black epoxy cationic electrocoating, resistant to corrosive and saline environments. Second coating using sandblasted silver colour acrylic green resin, UV-stabilized.
 Electric gear: 230V/50 Hz power supply. Flexible double insulation silicone wire, terminated with admiralty brass clamps. 2P terminal block with maximum allowed lead cross section of 2.5 sq mm.
 Equipment: standard knife switch. Power supply can be cut off in case of maintenance.
 Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

- Download**
- DXF 2D
- 3173.dxf
 - 3DS
- disano_3173_montecarlo.3ds
 - 3DM
- disano_3173_montecarlo.3dm
 - Montaggi
- montecarlo_mont.dxf

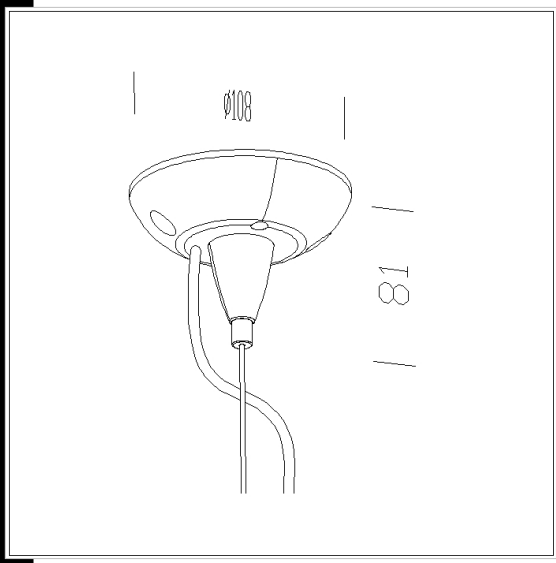

Code	Gear	Kg	Watt	Base	Lamps	Colour
326641-00	CNR-L	9,00	CDM-TS 150	Rx7s	13250lm-3000K-Ra 1b	SILVER/GRAPHITE
326644-00	CELL	9,00	FLC 1x70T/E	GX24q-6	5200lm-4000k-Ra 1b	SILVER/GRAPHITE
326640-00	CNR-L	9,00	JM-TS 150	Rx7s	12000lm-4000K-Ra 1b	SILVER/GRAPHITE

Accessories

	- 15 ceiling mount		- 380 Suspension 3x		- 2509 powered suspension
--	--------------------	--	---------------------	--	---------------------------