

3177 Montecarlo - bike trails



Housing/Frame: in die-cast aluminium. With aluminium bracket (pole connection Ø60).

Diffuser: tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150-1/2001 tests).

Reflector: non-polluting louvre, in pressed aluminium 99.85, anodically oxidized, 3 mm thick, polished.

Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.


Standard supply: in case of maintenance, the upper housing remains open through brackets that prevent accidental closing.

Standard knife switch and quick connector for electrical connection.

Double power version: the products come with remote control installation and power adaptor and can be ordered using sub code 3078. Products fitted with remote control installation only can be ordered using sub code 0078.

Upon request: coloured versions, surcharge applicable.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

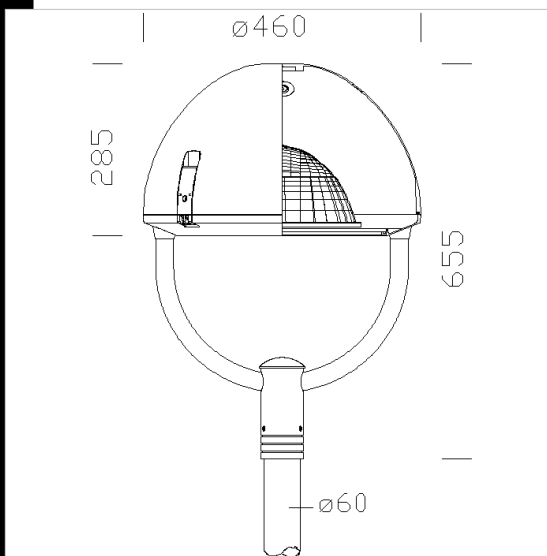

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
326681-00	CNR-L	10.91	CDO-TT 70-6300lm-2800K-Ra 1b	82 W	E27	GREY9007/GRAF
326680-00	CNR-L	10.91	SAP-T 70-6000lm-2000K-Ra 4	0 W	E27	GREY9007/GRAF

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated