


**3137 Campana**

Housing/Frame: in die-cast aluminium with latch.  
 Reflector: NON-POLLUTING LOUVRE in pressed 99.85 aluminium, anodically oxidized and polished.  
 Diffuser: tempered glass, 4 mm thick, thermal shock and impact resistant (UNI EN 12150-1/2001 tests).  
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating. Reflector, ceramic white.  
 Electric gear: 230V/50 Hz power supply. Flexible double insulation silicone wire, terminated with admiralty brass clamps. 2P terminal block with maximum allowed lead cross section of 2.5 sq mm.  
 Equipment: standard knife switch.  
 Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.


**Download**

- DXF 2D  
- 3137.dxf
- 3DS  
- disano\_3137\_campana.3ds
- 3DM  
- disano\_3137\_campana.3dm
- Montaggi  
- CAMPANA.pdf

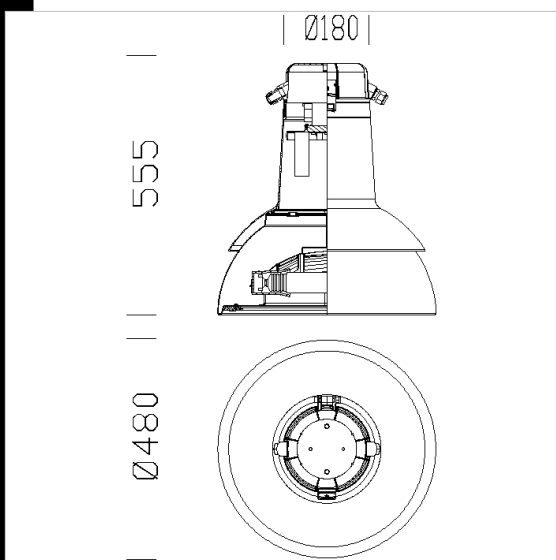

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
326731-00	CNR-L	9.30	SAP-T 250-33000lm-2000 K-Ra 4	277 W	E40	GRAFITE/BIANC O
326730-00	CNR-L	9.30	SAP-T 150-17200lm-2000K-Ra 4	166 W	E40	GRAFITE/BIANC O
326732-00	CNR-L	9.30	JM-E 150-14000lm-4000K-Ra 1b	166 W	E27	GRAFITE/BIANC O
326735-00	CNR-L	8.30	SAP-T 70-6000lm-2000K-Ra 4	83 W	E27	GRAFITE/BIANC O

**Accessories**

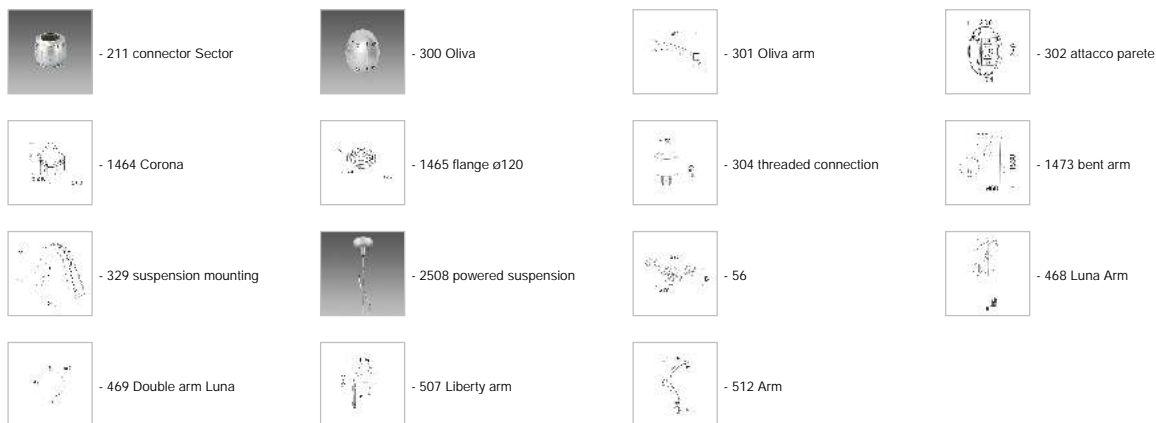

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated